
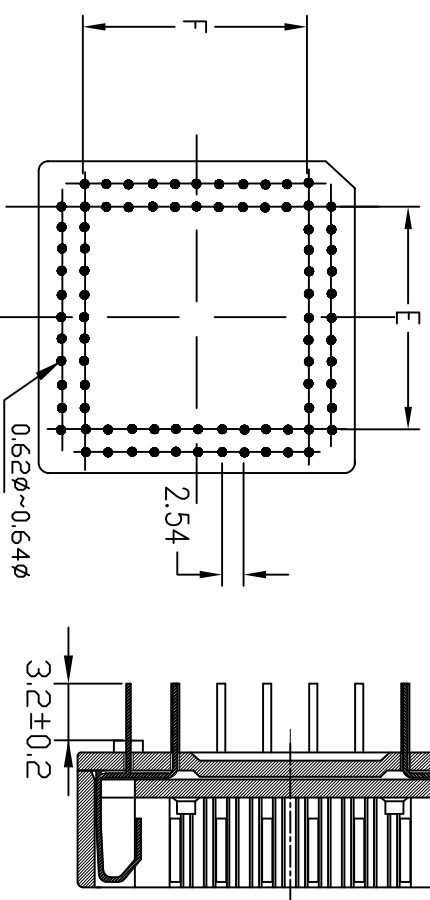


NO OF CONTACT	A±0.15	B±0.15	C±0.15	D±0.15	E±0.15	F±0.15
20pins	15.50	15.50	5.08	5.08	5.08	5.08
28pins	18.04	18.04	7.62	7.62	7.62	7.62
32pins	18.04	20.54	7.62	10.16	7.62	10.16
44pins	23.48	23.48	12.70	12.70	12.70	12.70
52pins	25.88	25.88	15.24	15.24	15.24	15.24
68pins	31.04	31.04	20.32	20.32	20.32	20.32
84pins	36.04	36.04	25.40	25.40	25.40	25.40

Insulator Material:PPS (UL 94V-0)
 Contact Resistance:30m Ohm MAX at DC 100mA
 Current Rating:1 AMP

Dielectric Withstanding Voltage:AC 500V For 1 minute
 Temperature Rating:-55°C ~ +105°C
 Insulator Resistance:1000M Ohm Min at DC 500V
 RoHS

Order Information

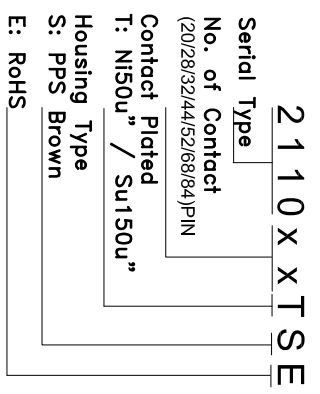

易昕企業有限公司 LEAMAX ENTERPRISE CO., LTD.		TITLE PLCC DIP PPS TIN RoHS (20P/28P/32P/44P/52P/68P/84P)	
PROJ	SCALE : F	DO NOT SCALE DWG	
APP	CHEN	13-03-14	
CHK	HUANG	03-03-14	
DRW	SHIEH	04-09-01	
UNIT MM		DWG NO.2110-TSE	REV. X2
SHT 1 OF 1		SIZE A4	