

Specifications:

Current rating:1.0A AC/DC
 Voltage rating:100V AC/DC
 Contact resistance:15m ohm. max.
 Insulator resistance:5000M ohm. Min.
 Withstanding voltage:1000V AC for one minute
 Operating temperature range:-40°C to +105°C
 Material and Finish:
 Insulator:PBT (UL94V-0)
 Standard Color:Black

Contact:Beryllium Copper(Becu) Gold Plated
 Sleeve Barrel:Copper Alloy Tin Plated


ORDER INFORMATION

2 1 2 1 - x x x E

- RoHS
- N: 3" (Space: 7.62mm)
- W: 6" W/ O Middle Bar (Space: 15.24mm)
- B: 6" W/ Middle Bar (Space: 15.24mm)
- No. of Contacts
- Machine Pin 2.54mm Type

Note1: W/O middle bar(6~16P)
 With middle bar(18~48P)

Circuits	DIM.A	DIM.B	DIM.C	DIM.D	Space	Circuits	DIM.A	DIM.B	DIM.C	DIM.D	Space	
6	7.62	5.08	10.16	7.62	03	24	30.48	27.94	17.78	15.24	06	
8	10.16	7.62	10.16	7.62		28	35.56	33.02	17.78	15.24		
14	17.78	15.24	10.16	7.62		32	40.64	38.10	17.78	15.24		
16	20.32	17.78	10.16	7.62		40	50.80	48.26	17.78	15.24		
18	22.86	20.32	10.16	7.62		42	53.34	50.80	17.78	15.24		
20	25.40	22.86	10.16	7.62		48	60.96	58.42	17.78	15.24		
24	30.48	27.94	10.16	7.62								
28	35.56	33.02	10.16	7.62								

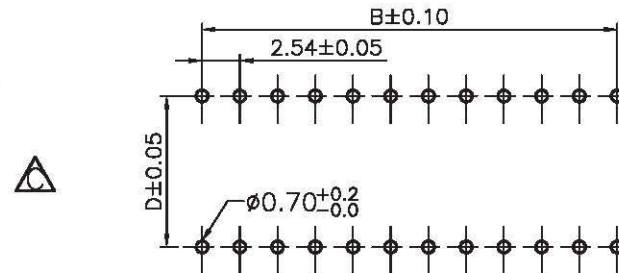

PCB Layout

RoHS Compliant

REV	DATE	FILE	BY	APP	GENERAL TOLERANCE:
F				James	.X=±0.20
E				11-07-13	.XX=±0.15
D				CHK	
C	08-09-09	ECN-TW090901	Allen	Huang	UNIT: MM
B	05-09-08	ECN-TW0800904	Allen	01-07-13	SCALE: 1:1
A	31-07-08	(PC0154)	Allen	DRW	SHEET: 1 / 1
				Allen	PROJECTION:
				31-07-08	

易昕企業有限公司
LEAMAX ENTERPRISE CO., LTD.

DESCRIPTION:
2.54mm IC Socket Machine Pin

DWG NO. 2121-101

SIZE
A4