
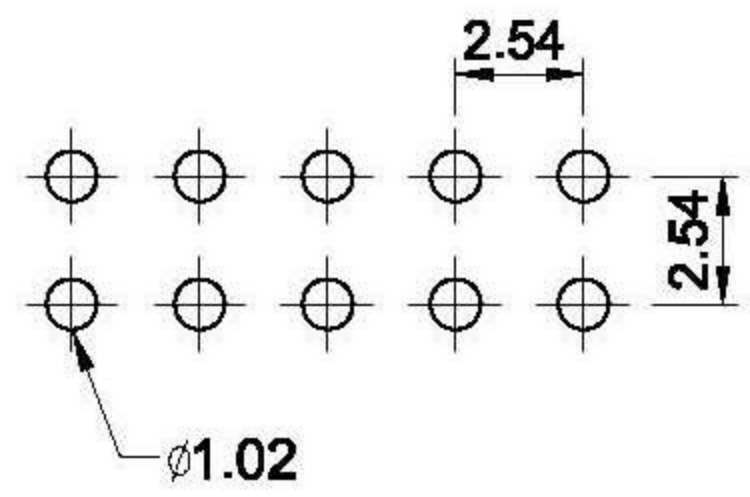


| Rev | Modification | Date | Validate |
|-----|------------------------|------------|----------|
| B | Remove insulator+0.4mm | 2010/07/01 | Fen-Fen |

RoHS




**Recommended
P.C. Board Hole Layout**

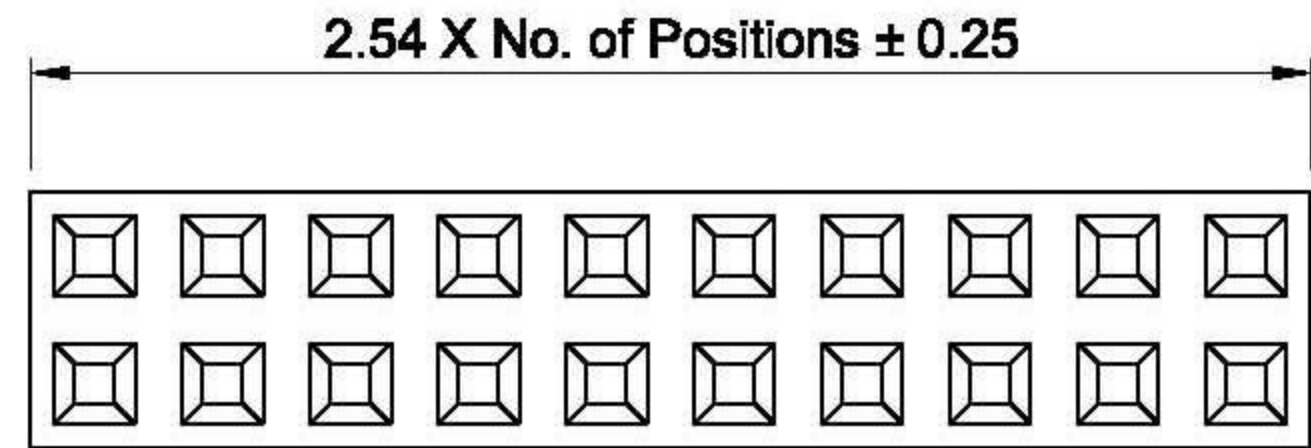

Specifications

- Current Rating : 3 Amps
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 600V
- Operating Temperature : -40°C ~ +105°C
- Contact Material : Phosphor Bronze
- Insulator Material : Polyester, UL 94V-0 Nylon-6T
- Contact Plated : See Option / Standard: Full Gold

Order Information

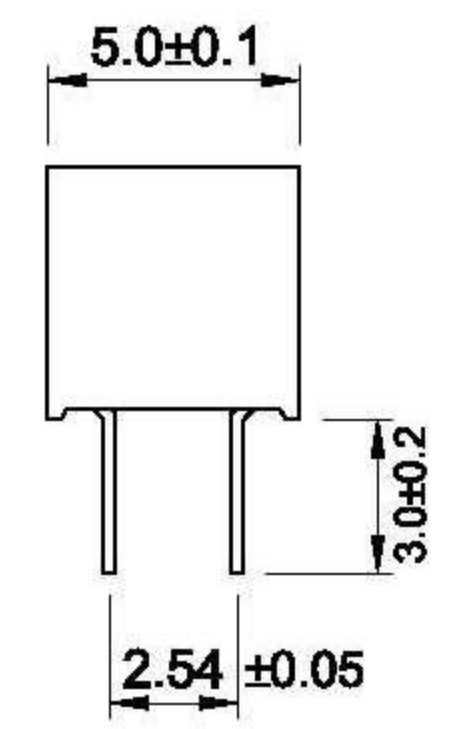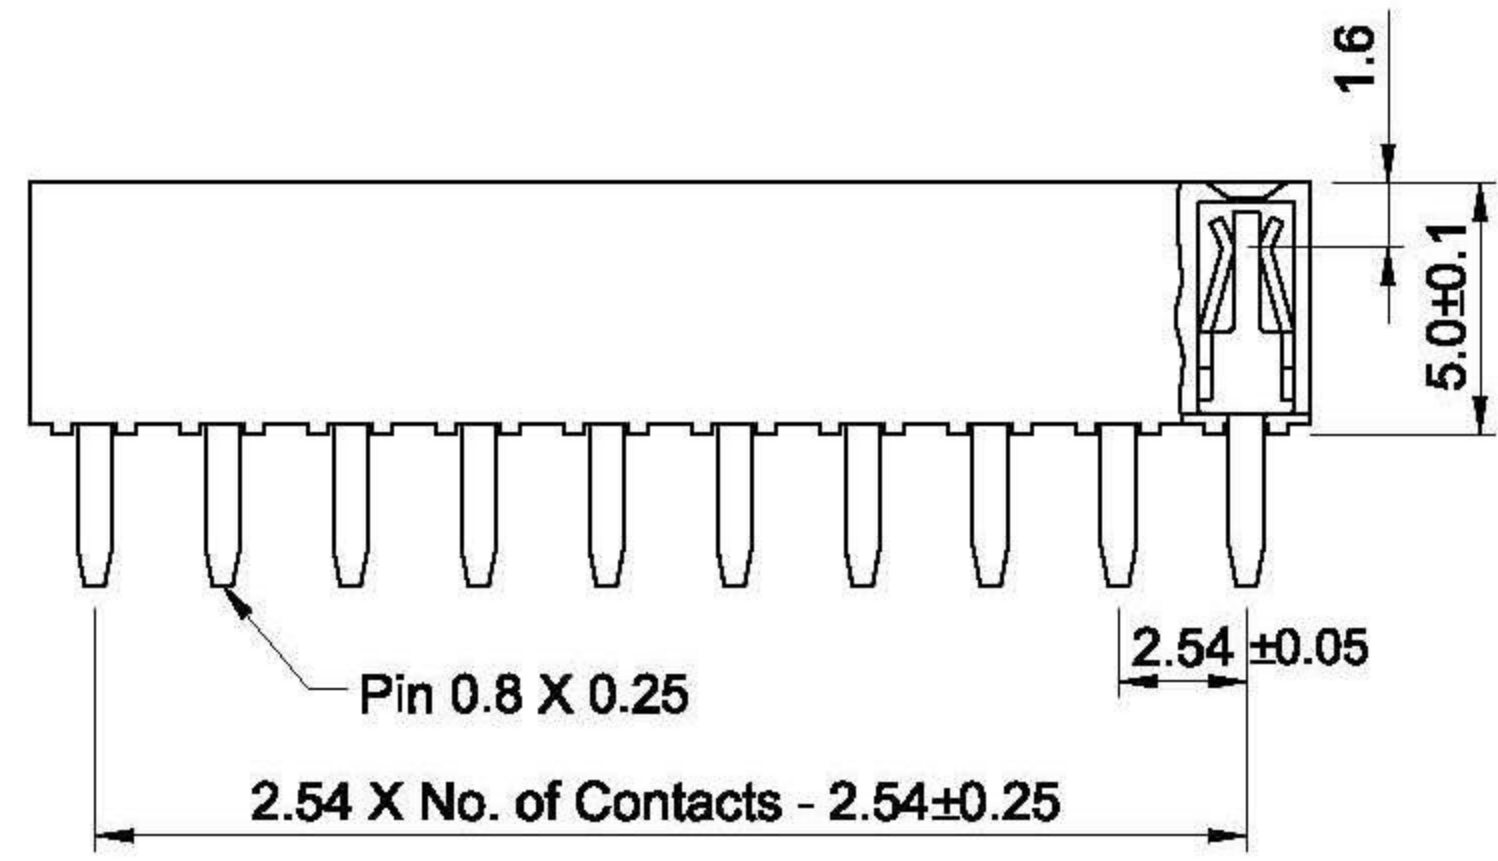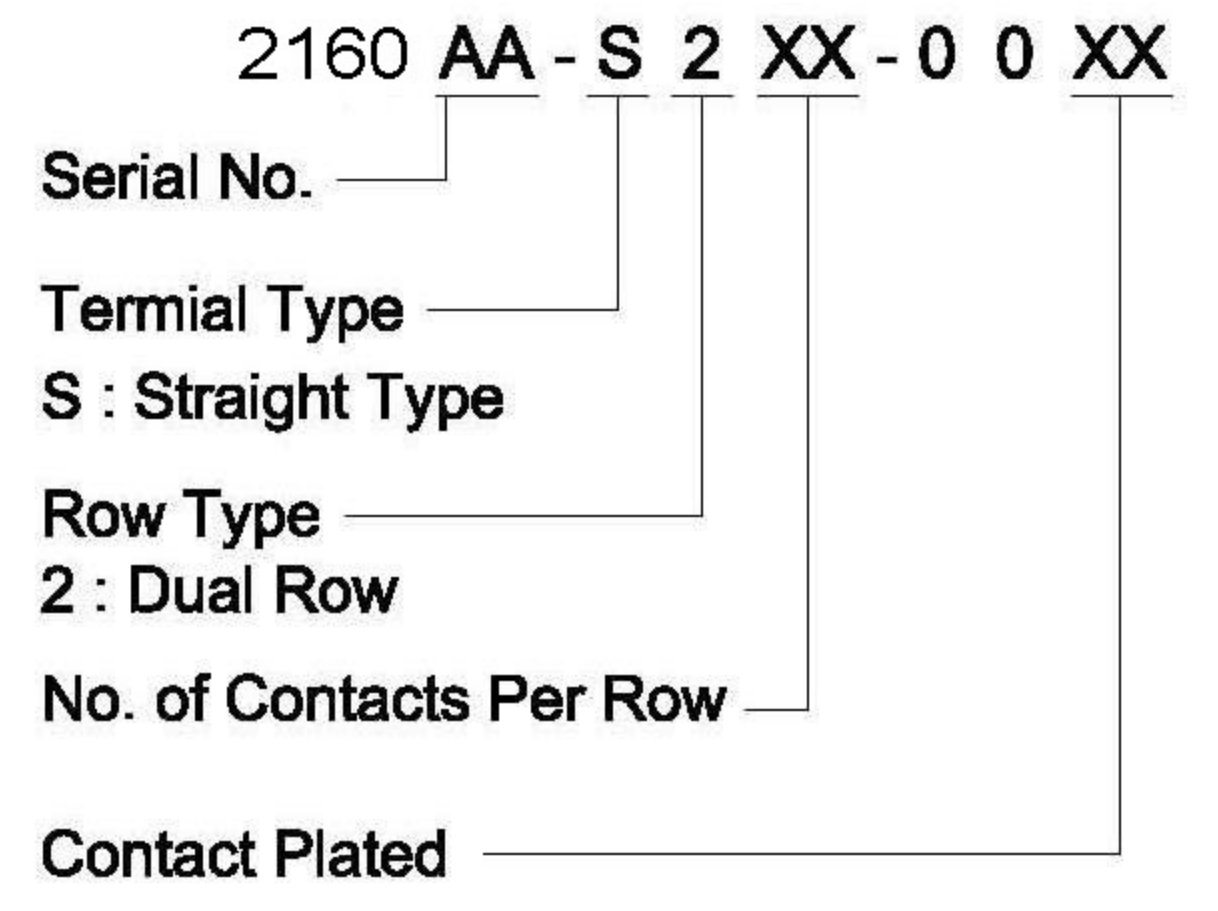

| Contact Plating Option | Full Gold Plating | Gold Plated On Contact Area Tin Plated On Solder Area | Full Tin Plating |
|------------------------|---|---|------------------|
| | GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u" | SA : Gold Flash SC : Gold 10u" SD : Gold 15u" SE : Gold 30u" | TA : Tin 100u" |

| GENERAL TOLERANCE | | 單位 (UNIT) | 料號 (PART NO.) | 圖號 (DWG NO.) | 易昕企業有限公司 LEAMAX ENTERPRISE CO., LTD | |
|-------------------|------------|---------------|-------------------|--------------|--|--------------|
| X ± 0.50 | X ° ± 5° | mm | 2160 AA-S2XX-00XX | 2160AA-001 | 名稱 (TITLE): Female Header P:2.54 X 2.54mm Profile : 5.0mm, Dual Rows, Straight Type | |
| .X ± 0.20 | .X ° ± 2° | 審核 (APPROVAL) | 核對 (CHECKED) | 製圖 (DRAWN) | 比例 SCALE 3:1 | 張數 SHEET 1/1 |
| .XX ± 0.10 | .XX ° ± 1° | James | Mary | Fen-Fen | 角法 PROJ. | 更改 REV. B |
| DATE: 2010/07/01 | SCM1 | 2011/10/06 | | | | |