

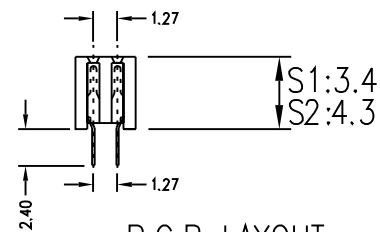
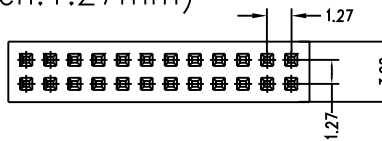
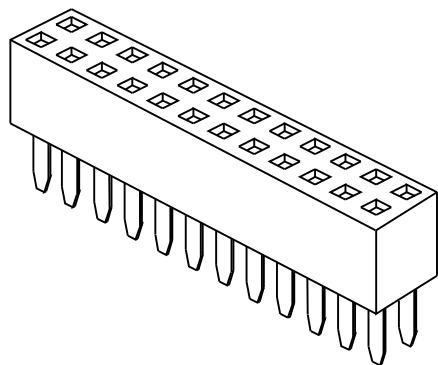


216 2B1 PIN HEADER (Pitch:1.27mm)

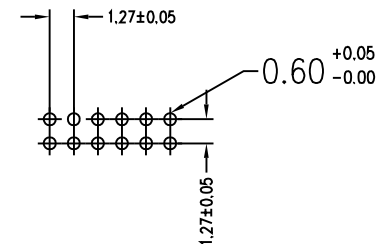

P.C.B. LAYOUT

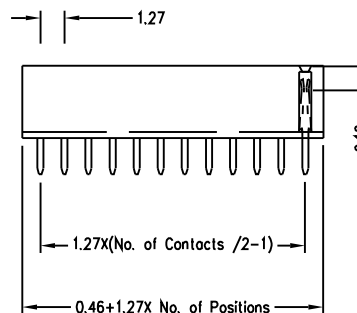

SPECIFICATIONS

CURRENT RATING:1AMP
 INSULATOR RESISTANCE:5000MΩMIN
 DIELECTRIC WITHSTANDING:AC 500V
 OPERATING TEMPERATURE:-40°C-+105°C
 CONTACT MATERIAL:PHOSPHOR BRONZE OR BRONZE
 INSULATOR MATERIAL:POLYESTER UL94V-0
 NYLON-6T

FINISH:GOLD FLASH

ORDER INFORMATION:

2162 2X ?? -S1 -D1 -G
 Contact Plating:G:Gold Fflash
 Base Height:D1:3.4mm
 D2:4.3mm
 S1:Straight Type
 No of Contacts 3~50



易昕企業有限公司
 LEAMAX ENTERPRISE CO., LED.

| | | | | | |
|------|-------|-------------------------------|---------|------------|---------|
| PROJ | | SCALE : F DO NOT SCALE DWG | MOLD NO | 2162B1 | |
| APP | | | MODEL | FILE NO | REV. X1 |
| CHK | CCJ | 91.11.05 | | | |
| DGN | AMY | 91.11.05 | UNIT | | SIZE A4 |
| DRW | SHIEH | 91.11.05 | MM | SHT 1 OF 1 | |