



216 2C1 FEMALE HEADER

1.27X2.54mm Dual Row/Straight

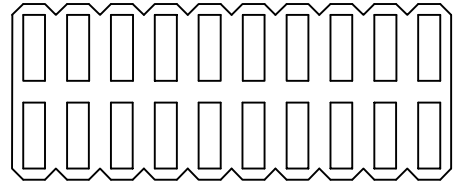

A=1.27X(No. of Contacts/2 -1)
B=1.27XNo. of Positions

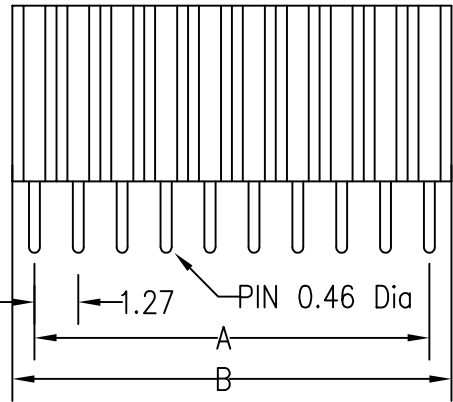


ORDER INFORMATION:



2162C1 2X ?? -S -D1 -G

- S: Straight Type
- D1: Length: 15mm, 24mm, 30mm
- G: Contact Plating: G: Gold Flash

No of Contacts 3~50

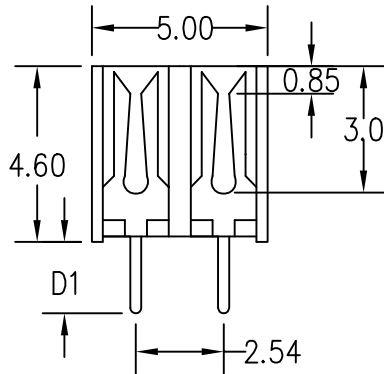



P.C.B Hole Layout

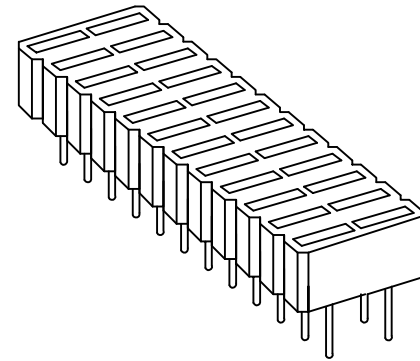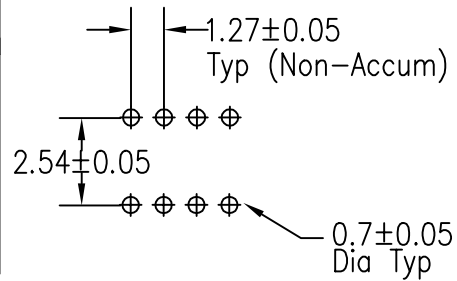

SPECIFICATIONS

CURRENT RATING: 1AMP
 INSULATOR RESISTANCE: 5000MΩMIN
 DIELECTRIC WITHSTANDING: AC 500V
 OPERATING TEMPERATURE: -40°C--+105°C
 MAX PROCESSING TEMP: 230° for 30SECONDS
 CONTACT MATERIAL: PHOSPHOR BRONZE OR BRONZE
 INSULATOR MATERIAL: POLYESTER UL94V-0
 NYLON-6T
 FINISH: GOLD FLASH

 易昕企業有限公司 LEAMAX ENTERPRISE CO., LED.					
PROJ	 SCALE : F DO NOT SCALE DWG		MOLD NO 2162C1		
APP			MODEL	FILE NO	REV. X1
CHK	CCJ	90.09.04	UNIT MM	SHT 1 OF 1	SIZE A4
DGN	AMY	90.09.04			
DRW	SHIEH	90.09.04			