

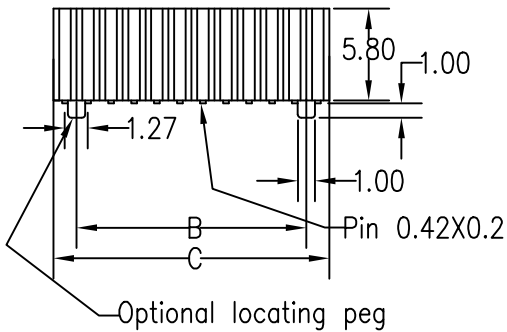
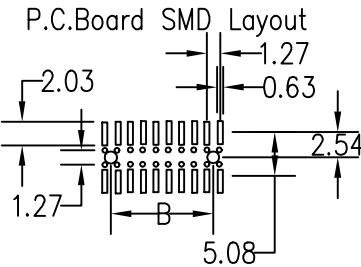
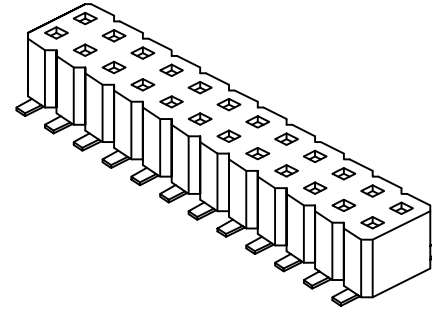


2162C3 FEMALE HEADER

1.27*2.54 mm Dual Row/SMT Type





A=1.27X(No. of Contacts/2-1)
 B=1.27X(No. of Contacts/2-2)
 C=0.2+1.27XNo. of Positions



SPECIFICATIONS
 CURRENT RATING:1AMP
 INSULATOR RESISTANCE:5000MΩMIN
 DIELECTRIC WITHSTANDING:AC 500V
 OPERATING TEMPERATURE:-40°C-+105°C
 MAX PROCESSING TEMP:230° for 30SECONDS
 CONTACT MATERIAL:PHOSPHOR BRONZE OR BRONZE
 INSULATOR MATERIAL:POLYESTER UL94V-0
 NYLON-6T
 FINISH:GOLD FLASH

ORDER INFORMATION:
 2162C3 2X ?? -HS -0 -G
 Contact Plating:G:Gold Fflash
 0: W/O Locating peg
 I: With Locating peg
 HS:SMT Type
 No of Contacts 3~50

 易昕企業有限公司 LEAMAX ENTERPRISE CO., LED.					
PROJ		SCALE : F DO NOT SCALE DWG	MOLD NO 2162C3		
APP			MODEL	FILE NO	REV. X1
CHK	CCJ	90.09.04	UNIT MM	SHT 1 OF 1	SIZE A4
DGN	AMY	90.09.04			
DRW	SHIEH	90.09.04			