

**SPECIFICATIONS**

**MATERIAL:**

- 1. Insulator : PBT Polyester UL 94-V0
- 2. Color : Black
- 3. Contacts : SQ 0.64mm Gold/Tin Selective Plated

**ELECTRICAL:**


- 1. Current Rating : 1.5 Amps
- 2. Operation Temperature : -25°C~+85°C
- 3. Contact Resistance : 10 m ohms max
- 4. Insulation Resistance : 1000MΩ min
- 5. Dielectric Withstanding : 500V AC

Order Information

PART NO. 2 1 7 1 x x x E  
 No of Contacts \_\_\_\_\_  
 \_\_\_\_\_ RoHS

Terminal Type:  
 S: Straight Type  
 R: Right Angle Type

CONTACTS	A	B	C	D
10	32.00	17.96	21.84	10.16
14	37.08	23.04	26.92	15.24
16	39.62	25.58	29.46	17.78
20	44.70	30.33	34.54	22.86
26	52.32	38.28	42.16	30.48
30	57.40	43.36	47.24	35.56
34	62.48	48.44	52.32	40.64
40	70.10	56.06	59.94	48.26
50	82.80	68.76	72.64	60.96
60	95.50	81.46	85.34	73.66
64	100.58	86.54	90.42	78.74

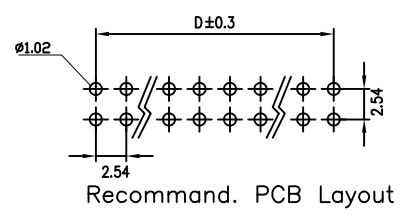

<b>易昕企業有限公司</b> LEAMAX ENTERPRISE CO., LTD.				
PROJ		SCALE : F	DWG NO.2171-001	
		DO NOT SCALE DWG		
GENERAL TOLERANCE	APP	CHK	DRW	REV. X3
± 0.3	Chen	Huang	SHIEH	
				SIZE A4
				SHT 1 OF
				UNIT MM
				TITLE Box Header Ejector Type 2.54mm
				REV. X3