


NOTES

- 1.MATERIAL
 1.1 Insulator:PBT+15% Glass Fiber (UL94V-0)
 1.2 Contact: Phosphor Bronze
 1.3 Contact Plating: Gold/Nickel Plated
- 2.SPECIFICATION
 2.1 Current Rating: 3 Amp
 2.2 Dielectric Strength: 500V AC
 2.3 Insulator Resistance: 1000M ohms Min
 2.4 Contact Resistance: 20m ohms Max
 2.5 Operation Temperature: -45°C to +105°C

ORDER CODE :

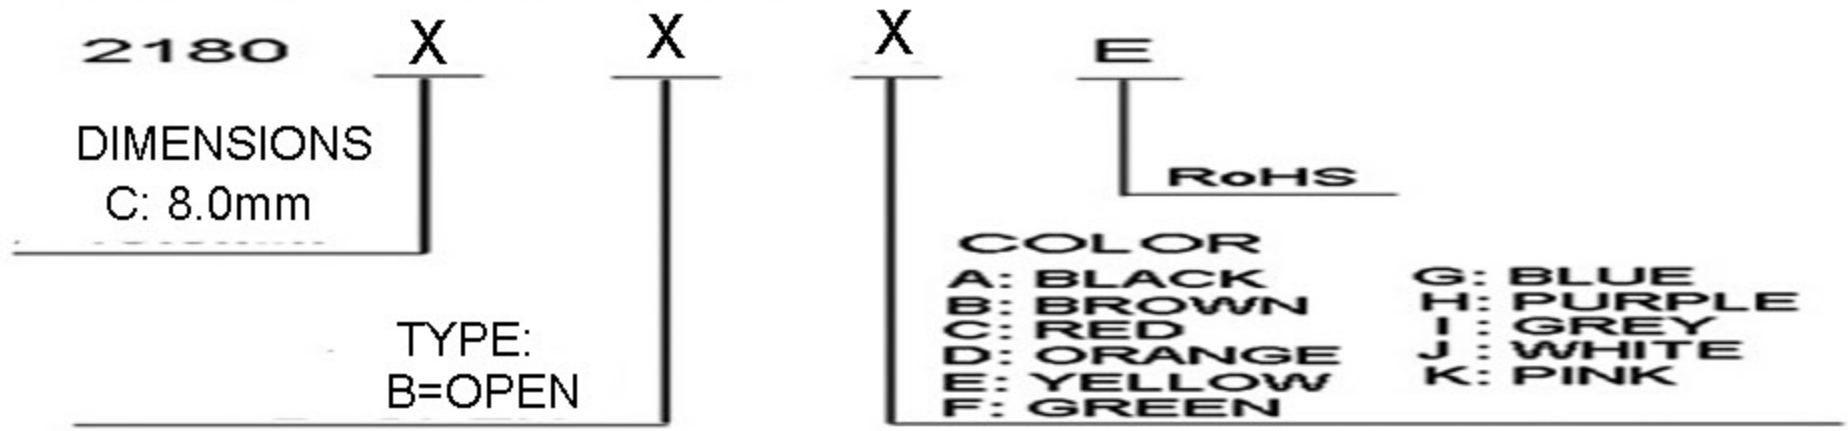

DIMENSIONS TOLERANCE

METRIC

.0 = ±.20
 .00 = ±.15
 .000 = ±.10
 .0000 = ±.05
 ANG. = ± 2°

單位(UNITS)	mm
數量(QTY)	N/A
材料(MTL)	SEE NOTE
處理(FINISH)	SEE NOTE
繪圖(DRAW)	
設計(DE'N)	
審核(CH'K)	Stella 2011.10.05
核准(APP'D)	James 2011.10.05

LEAMAX 易昕企業有限公司
 LEAMAX ENTERPRISE CO., LED.

Dw No: 2180-005
 MINI JUMPER 2.54mm OPEN H:8.0mm

料號(PART NUMBER)
2180CBxE

比例(SCALE)	1/1	圖紙(SIZE)	A4	頁次(SHEET)	1	版次(REV.)	G
-----------	-----	----------	----	-----------	---	----------	---