

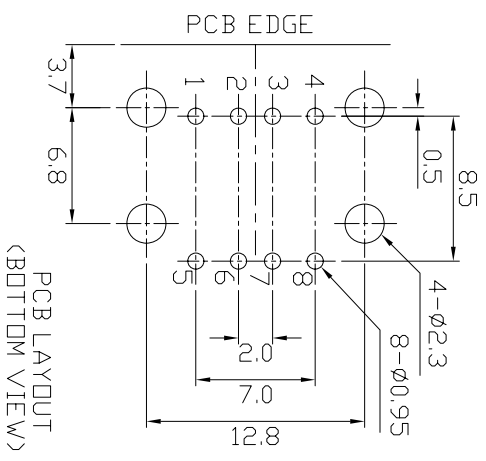
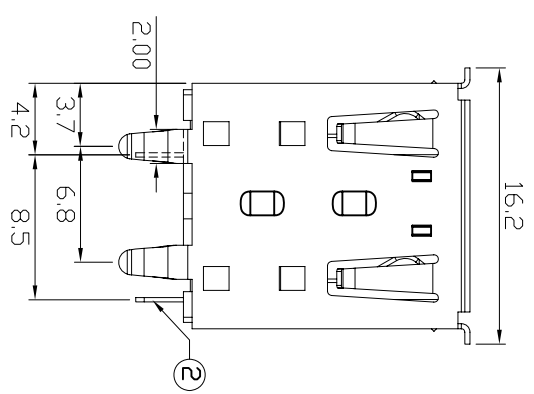


REV ZONE	REVISION	DATE

Specification:
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 1000M Ohm Min. At 500VDC.
Rated Voltage And Current: 1.5A At 250VAC Minimum.
Dielectric Withstanding Voltage:500V AC (rms) for 1 Minute(Rev. 2.0).
Durability (Life Test): 1500 Cycles.
Insertion Force: 35 Newton Maximum.
Extraction Force: 10 Newton Minimum.

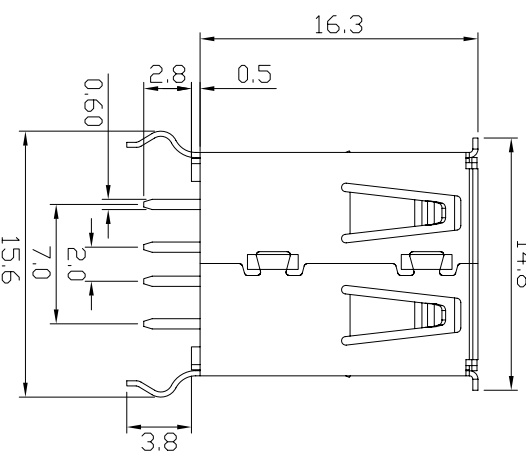

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	PBT G.F.	WHITE	1	
2	PIN TERM.	PHOS. BRONZE,T:0.25	GOLD-TIN PLATED	8	Gold:30u", Ni:40~60u", TIN:20u" (100% pure Tin of lead free plating)
3	SHELL	BRASS,T:0.3	NICKEL PLATED	1	Ni:80~120u"
4	SPRING CLIP	BRASS,T:0.3	NICKEL PLATED	1	Ni:80~120u"
5	SPEACER	P.E.	NATURAL	2	

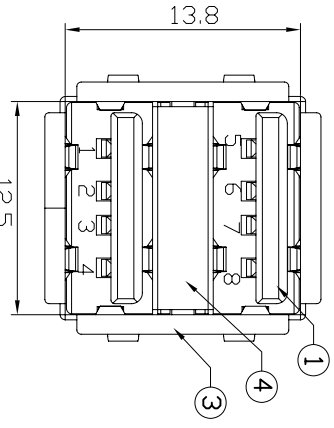

易昕企業有限公司
LEAMAX ENTERPRISE CO., LTD.

Drawing No	UNIT	SCALE	TITLE
3212-006	mm	1:1	DUAL USB A TYPE VERTICAL 8 PIN DFP

MODEL	3212-DKE-30UW	PAGE 1 OF 1	APPD. JAMES 27-04-12	CKD. SHIRLEY 27-04-12	DWG. TINA 11-05-10	DATE 11-05-10	TOLERANCE X: ±0.38 X: ±0.25 XX ±0.13 XXX ±0.05	PART NO. 3212-DKE-30UW	REV. A0
-------	---------------	-------------	----------------------	-----------------------	--------------------	---------------	---	------------------------	---------