



REV ZONE	REVISION	DATE

NO.	NAME	MATERIAL	FINISH	Q'TY
1	PIN TERM.	BRASS 0.4	TIN PLATED	1
2	SLEEVE TERM.	P.B.S 0.2	TIN PLATED	1
3	BREAK TERM.	BRASS 0.4	TIN PLATED	1
4	CENTER PIN	BRASS ϕ 1.3	NICKEL PLATED	1
5	HOUSING	PBT G.F.	BLACK	1
6	BACK COVER	PBT G.F.	BLACK	1

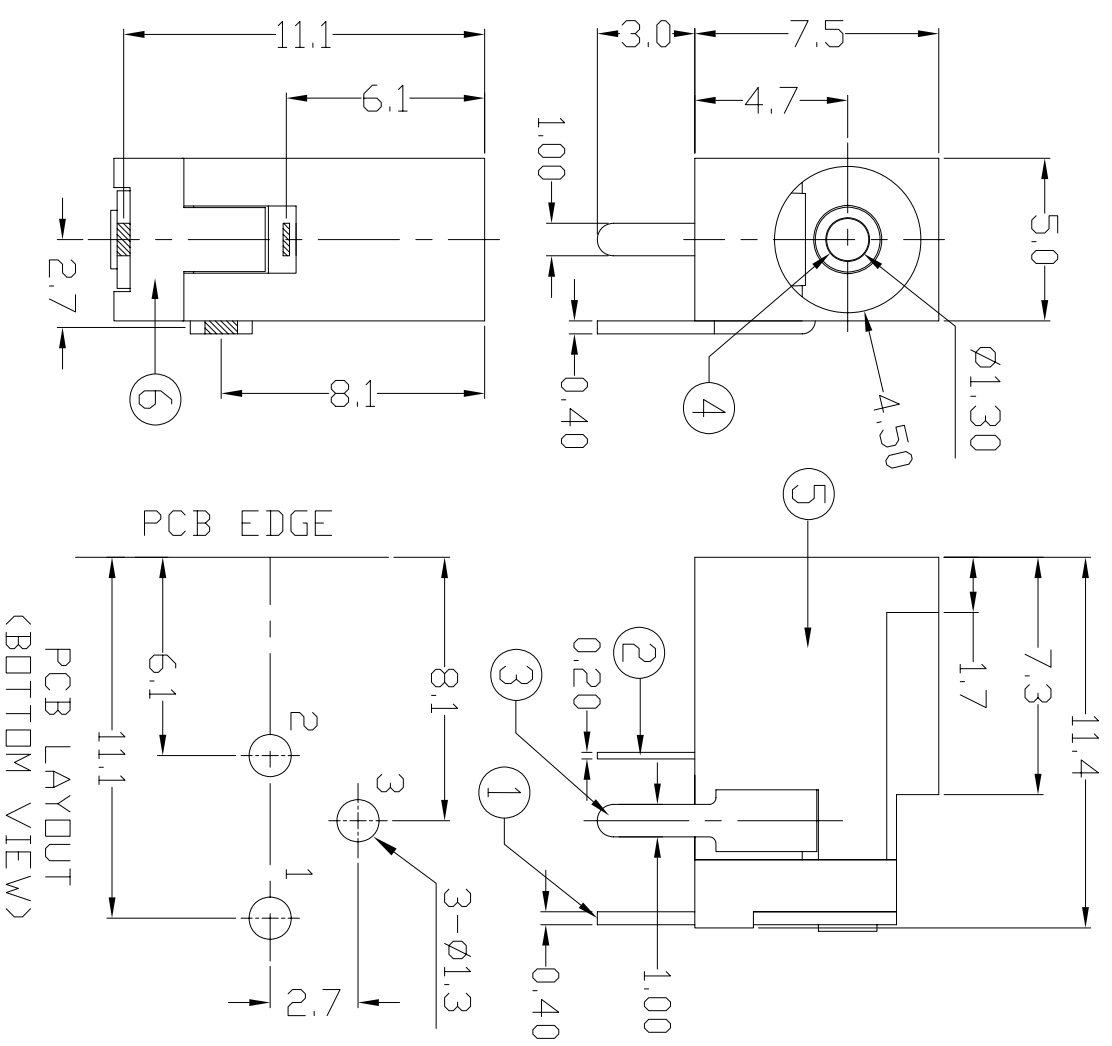

Specification:
 Contact Resistance: 30m Ohm Max. At AC 100mA Max 1KHz
 Insulation Resistance: 100M Ohm Min. At 500V DC
 Rated Voltage And Current: DC12V. 2A Max; AC 100V. 1A Max
 Dielectric Withstanding Voltage: 500V AC for 1 Minute
 Insertion Force: 3.0Kg Maximum.
 Extraction Force: 0.3Kg Minimum.



易昕企業有限公司
 LEAMAX ENTERPRISE CO., LTD.

Drawing No 3272-001 UNIT mm SCALE 1:1 TITLE DC POWER JACK

MODEL	3272-3PBE	PAGE	1 OF 1	APPD.	JAMES 01-06-12	CKD.	SHIRLEY 01-06-12	DWG.	TINA 30-12-08	DATE	30-12-08	TOLERANCE	X. X. XX XXX ±0.38 ±0.25 ±0.13 ±0.05	PART NO.	3272-3PBE	REV.	A0
-------	-----------	------	--------	-------	-------------------	------	---------------------	------	------------------	------	----------	-----------	---	----------	-----------	------	----