

FEATURE AND SPECIFICATIONS

FOR 0.3mm THICKNESS FFC/FPC.

VOLTAGE: 50V MAX.

CURRENT: 0.5A MAX.

CONTACT RESISTANCE: 20 milliohms MAX.

INSULATION RESISTANCE: 50 Megohms MIN.

DIELECTRIC WITHSTANDING VOLTAGE: 250V AC.

TEMPERATURE: -40°C TO 85°C

FPC RETENTION FORCE: PER PIN 0.3N(0.03Kgf) MIN



MATERIAL AND FINISH

HOUSING: HIGH-TEMP. THERMOPLASTIC. UL 94V-0.



ACTUATOR: HIGH-TEMP. THERMOPLASTIC. UL 94V-0.

CONTACT: PHOSPHOR BRONZE.

HOLDDOWN: BRASS.

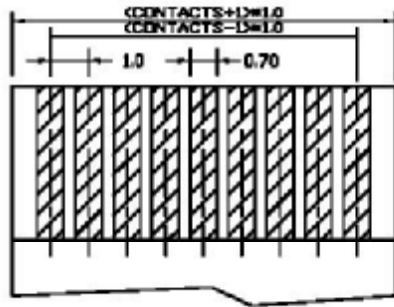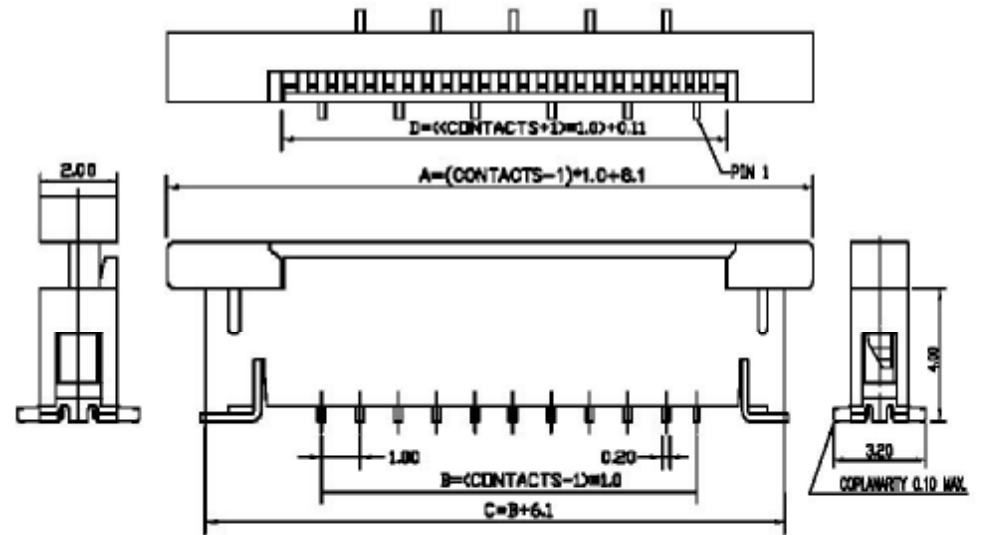

FFC/FPC DIMENSION
THICKNESS 0.30 mm

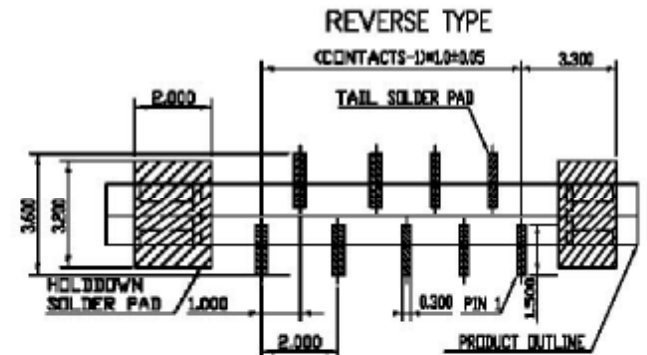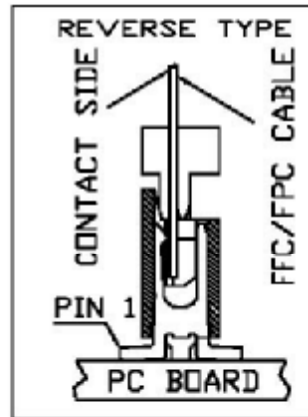

RECOMMENDED PCB LAYOUT

.X±0.20	.X±	單位: MM	H: 2.0mm	易昕企業有限公司 LEAMAX ENTERPRISE CO., LTD
.XX±0.15	.XX±	材質:		
.XXX±0.10	.XXX±	廠牌:	日期: 2009.06.04	名稱: ZIF FPC 1.0mm SMT
		數量:	繪圖: Amy Shen	TITLE: CONN. VERTICAL
			確認: James Chen	TOP ENTRY TYPE
				DWG NO: 5432B
				SCALE: 51
				SHEET: 1/1
				REV: A