
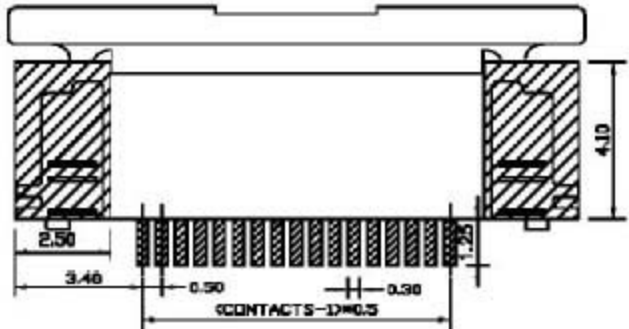

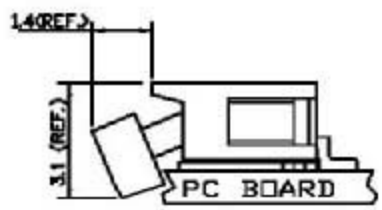
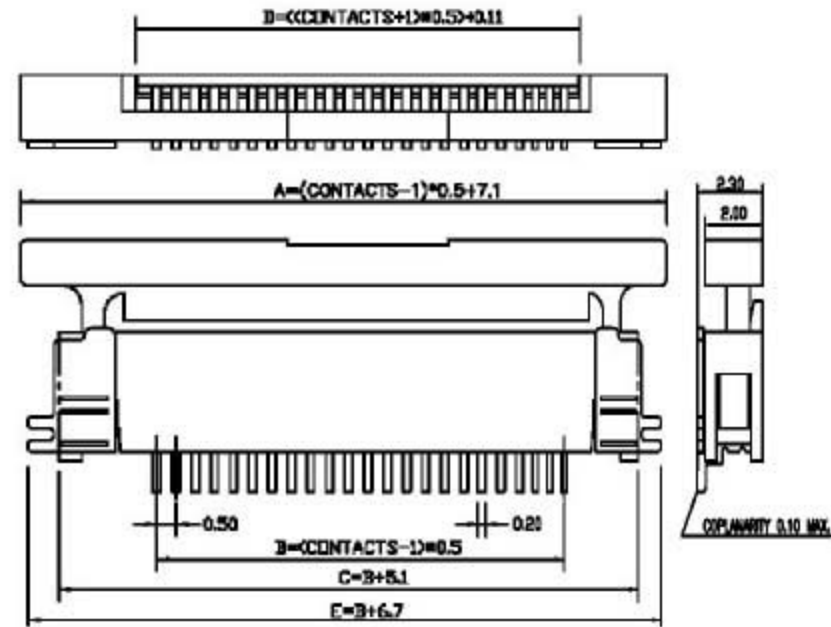


PIN	A	B	C	D	E
10	11.60	4.50	9.60	5.61	11.20
20	16.60	9.50	14.60	10.61	16.20
24	18.60	11.50	16.60	12.61	18.20
26	19.60	12.50	17.60	13.61	19.20
30	21.60	14.50	19.60	15.61	21.20
32	22.60	15.50	20.60	16.61	22.20
40	26.60	19.50	24.60	20.61	26.20
45	29.10	22.00	27.10	23.11	28.70
50	31.60	24.50	29.60	25.61	31.20
54	33.60	26.50	31.60	27.61	33.20
60	36.60	29.50	34.60	30.61	36.20


FEATURE AND SPECIFICATIONS

SIZES 03 TO 60 PIN.
 FOR 0.3mm THICKNESS FFC/FPC.
 VOLTAGE: 50V MAX.
 CURRENT: 0.5A MAX.
 CONTACT RESISTANCE: 20 milliohms MAX.
 INSULATION RESISTANCE: 50 Megohms MIN.
 DIELECTRIC WITHSTANDING VOLTAGE: 250V AC.
 TEMPERATURE: -40°C TO 85°C

MATERIAL AND FINISH
 HOUSING: HIGH-TEMP. THERMOPLASTIC, UL 94V-0.
 ACTUATOR: HIGH-TEMP. THERMOPLASTIC, UL 94V-0.
 CONTACT: SEE ORDERING CODE
 HOLDDOWN: BRASS, PLATING: SEE ORDERING CODE

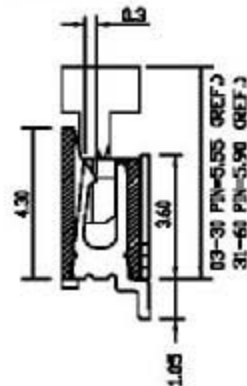

RECOMMENDED PCB LAYOUT

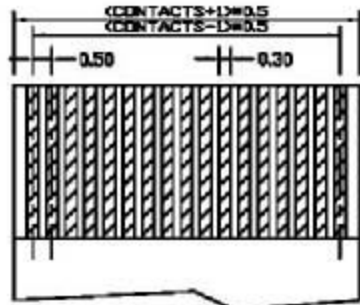

FFC/FPC DIMENSION THICKNESS 0.30 mm

.X±0.20	.X±	單位 MM	LEAMAX	LEAMAX ENTERPRISE CO., LTD
.XX±0.15	.XX±	料號		
.XXX±0.10	.XXX±	廠牌	易昕企業有限公司	名稱 ZIF FPC 0.5mm SMT
		廠址	日期 2011.09.26	TITLE CONN. HORIZONTAL
		數量	審核	SIDE ENTRY TYPE
			製圖 AMY SHEN	圖號 5435-xxTIE
				SCALE SHEET REV.
				5/1 A