



| REV | ZONE | REVISION | DATE |
|-----|------|----------|------|
|     |      |          |      |
|     |      |          |      |

| NO. | NAME        | MATERIAL    | FINISH        | Q'TY |
|-----|-------------|-------------|---------------|------|
| 1   | HOUSING     | PBT G.F.    | WHITE         | 1    |
| 2   | BARREL      | BRASS T:0.4 | NICKEL PLATED | 1    |
| 3   | TERMINAL    | BRASS T:0.5 | TIN PLATED    | 1    |
| 4   | FRONT SHELL | BRASS T:0.2 | NICKEL PLATED | 1    |

Specification:  
 Contact Resistance: 30m Ohm Max. At AC 100mA Max.1KHz.  
 Insulation Resistance: 100M Ohm Min. At 500V DC.  
 Rated Voltage And Current: DC 12V,2A Max.  
 Dielectric Withstanding Voltage: 500VAC At 60Hz For 1 Minute.  
 Durability (Life Test): 4000 Cycles.  
 Insertion Force: 0.3~3.0 Kg.  
 Extraction Force: 0.3~3.0 Kg.

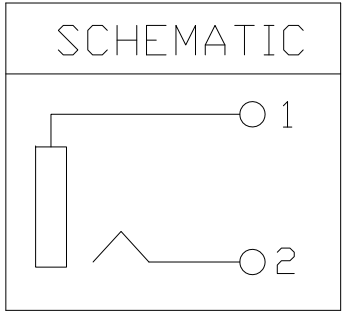

**Green Product**

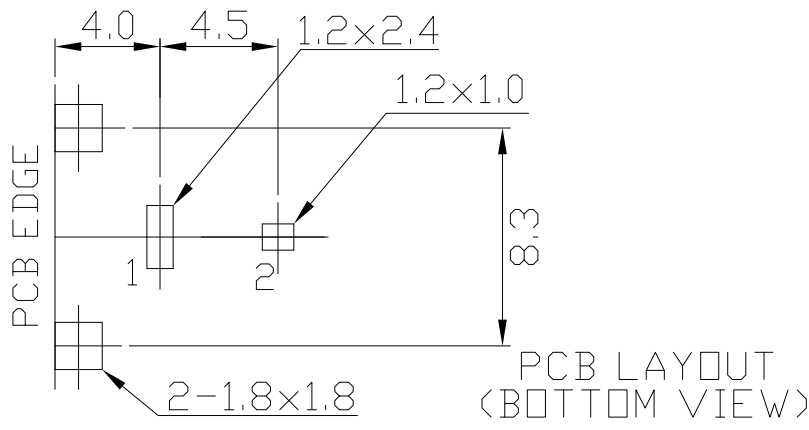

易昕企業有限公司  
 LEAMAX ENTERPRISE CO., LED.

| Drawing No        |                     |                  | UNIT     | SCALE   | TITLE          |      |
|-------------------|---------------------|------------------|----------|---|----------------|------|
| 8714-B01          |                     |                  | mm       | 1:1   | RCA JACK 1PORT |      |
| APPD.             | CKD.                | DWG.             | DATE     | TOLERANCE                                       | PART NO.       | REV. |
| JAMES<br>17-02-16 | SHIRLEY<br>01-02-16 | TINA<br>23-09-09 | 23-09-09 | X. +0.38<br>.X +0.25<br>.XX +0.13<br>.XXX +0.05 | 8714-BW1E      | A0   |

MODEL

8714-BW1E

PAGE 1 OF 1