


(1) CKT 16,20,22,24 WITHOUT BAR


CKT	A±0.20	B±0.20	C±0.20	D±0.20
16	14.22	12.45	10.10	7.62
20	17.78	16.00		
22	19.56	17.78		
24	21.34	19.56		

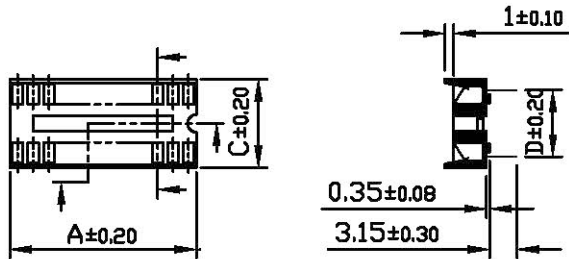



PN: 2122-xxNE

(2) CKT 24,28,30,32 HAVE ONE BAR

CKT	A±0.20	B±0.20	C±0.20	D±0.20
24	21.34	19.56	12.65	10.16
28	24.89	23.11		
30	26.67	24.89		
32	28.45	26.67		

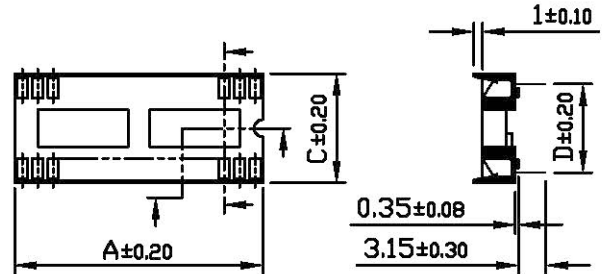

PN: 2122-xxGE

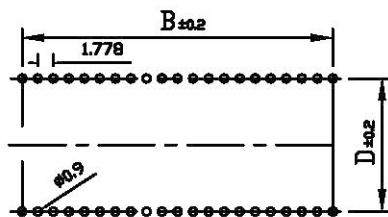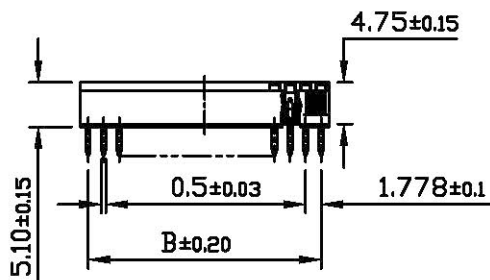

PCB LAYOUT

MATERIAL:

Contact:

phosphor Bronze thickness 0.17mm

Contact Plating: Sn-Cu plated 120u"~200u"

Insulator: PBT-4830 , UL 94V-0

SPECIFICATIONS:

Current Rating : 1A

Dielectric withstanding Voltage : 1000v RMS/minute

Insulator resistance : 5000 Megohms min.

Contact resistance : 20 milliohms initial

30 milliohms after test.

Operating temperatures : -55°C to 85°C

Insertion force : 340g (12 oz) max.per contact.

Withdrawal force : 80g (2.82 oz) min.per contact

ORDER INFORMATION

2122-XX X E

CKT SIZE
16,20,22,24,28,30,32

DIP SPACING
N: 7.62mm/.30inch
G: 10.16mm/.40inch

DO NOT SCALE PRINT		易昕企業有限公司 LEAMAX ENTERPRISE CO.,LTD.		
APP Chen 23-09-15	TOLERANCE:		TITLE:	
CHK Huang 01-09-15	.X ±0.15	IC SOCKET 1.778mm RoHS		
DRW Kelly 06-10-04	.XX ±0.3	DWG NO. 2122-001		
	UNIT: MM	SCALE: 1/1	SHEET: 1 OF 1	REV. 01