


REV ZONE	REVISION	DATE

Specification:
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 1000M Ohm Min. At 500VDC.
Rated Voltage And Current: 1.5A At 250VAC Minimum.
Dielectric Withstanding Voltage:
 750V AC (rms) for 1 Minute(Rev. 1.1)
Durability (Life Test): 1500 Cycles
Insertion Force: 35 Newton Maximum.
Extraction Force: 10 Newton Minimum.

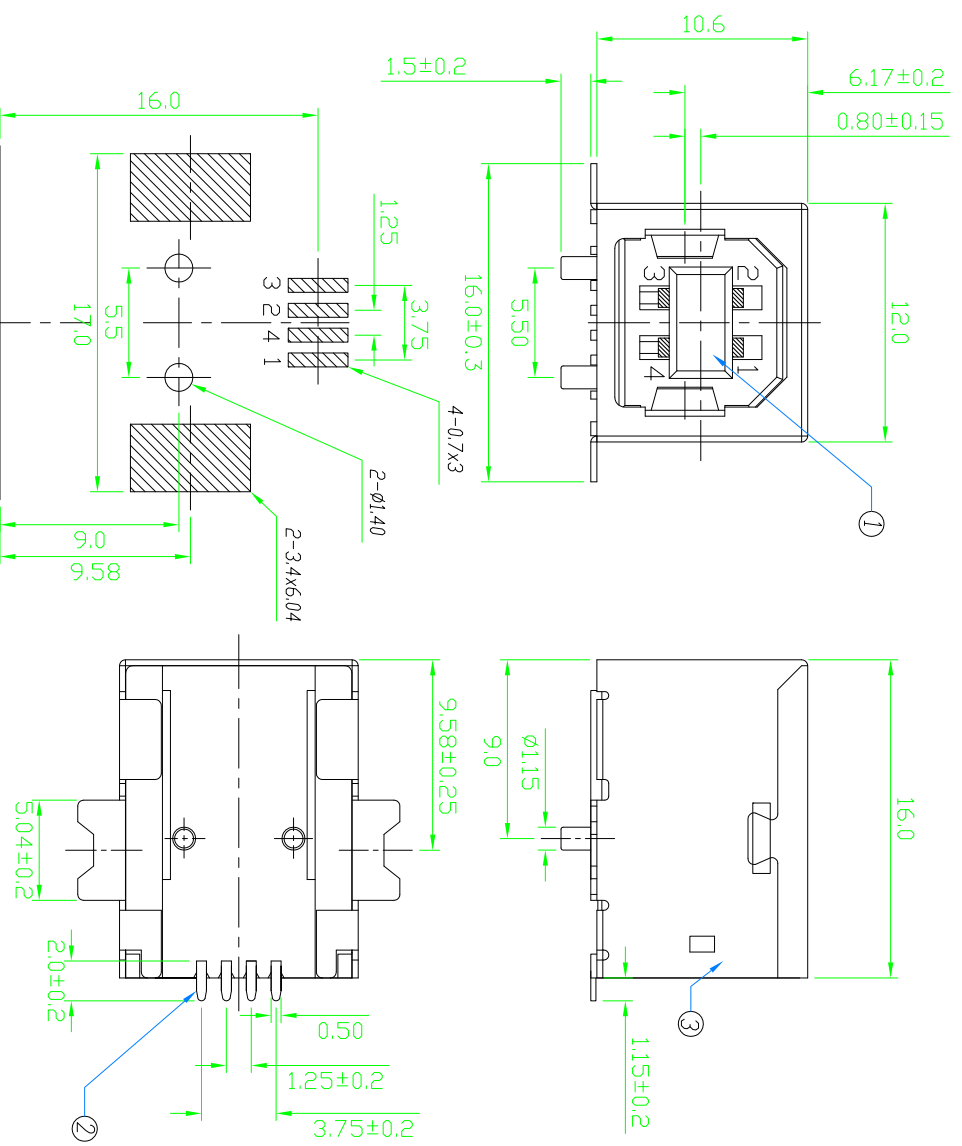

PCB EDGE
 PCB LAYOUT
 (COMPONENT SIDE)

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	NYLON PA9T GF.	WHITE	1	
2	TERMINAL	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	4	Gold#1~3u", Ni:40~60u", TIN:120u" (100% pure Tin of lead free plating)
3	SHELL	BRASS T:0.3	NICKEL PLATED	1	NI:50u" MINIMUM.



易昕企業有限公司
 LEAMAX ENTERPRISE CO., LTD.

Drawing No	UNIT	SCALE	TITLE
3213-004	mm	1:1	USB B TYPE FLAT 4 PIN SMT

APPD.	CKD.	DWG.	DATE	TOLERANCE	PART NO.	REV.
JAMES 03-02-12	SHIRLEY 03-02-12	TINA 18-12-07	18-12-07	X. X. XX XXX ±0.38 ±0.25 ±0.13 ±0.05	3213-BHE-01UW	A2