


REV. ZONE	REVISION	DATE

Specification:
 Contact Resistance: 30m Ohm Max.
 Insulation Resistance: 1000M Ohm Min. At 500VDC.
 Rated Voltage And Current: 1.5A At 250VAC Minimum.
 Dielectric Withstanding Voltage:
 500V AC (rms) for 1 Minute(Rev. 2.0)
 Durability (Life Test): 1500 Cycles
 Insertion Force: 35 Newton Maximum.
 Extraction Force: 10 Newton Minimum.

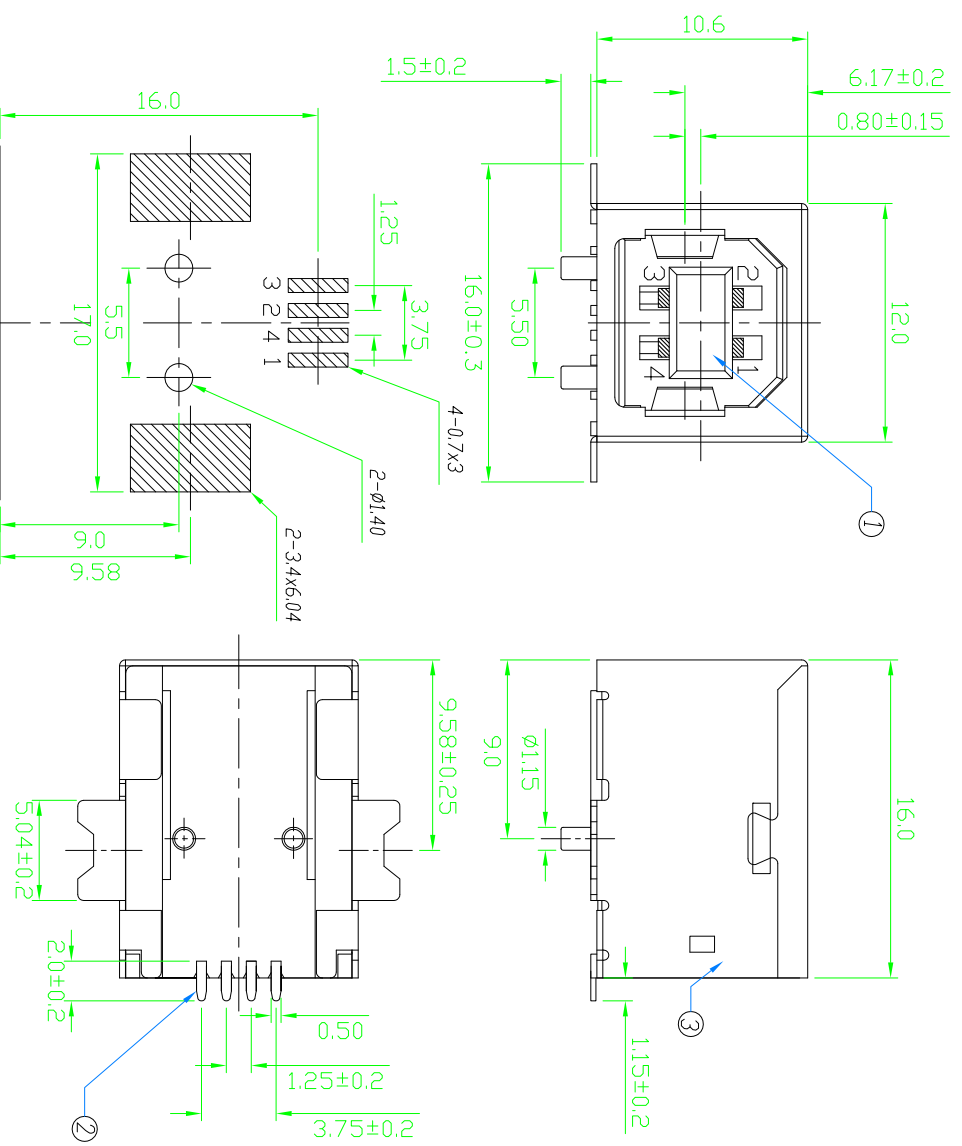

PCB LAYOUT
(COMPONENT SIDE)

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	NYLON PA9T GF.	WHITE	1	
2	TERMINAL	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	4	Gold:30u", NI:40~60u", TIN:120u" (100% pure Tin of lead free plating)
3	SHELL	BRASS T:0.3	NICKEL PLATED	1	NI:50u" MINIMUM.



易昕企業有限公司
LEAMAX ENTERPRISE CO., LTD.

MODEL	3213-BHE-30UW	PAGE	1 OF 1
APPD.	JAMES 10-09-13	CKD.	SHIRLEY 03-02-12
		DWG.	TINA 18-12-07

Drawing No	3213-005	UNIT	mm	SCALE	1:1	TITLE	USB B TYPE FLAT 4 PIN SWT
TOLERANCE	X. ±0.38 XX ±0.25 XXX ±0.13 XXX ±0.05	DATE	18-12-07	PART NO.	3213-BHE-30UW	REV.	A2