
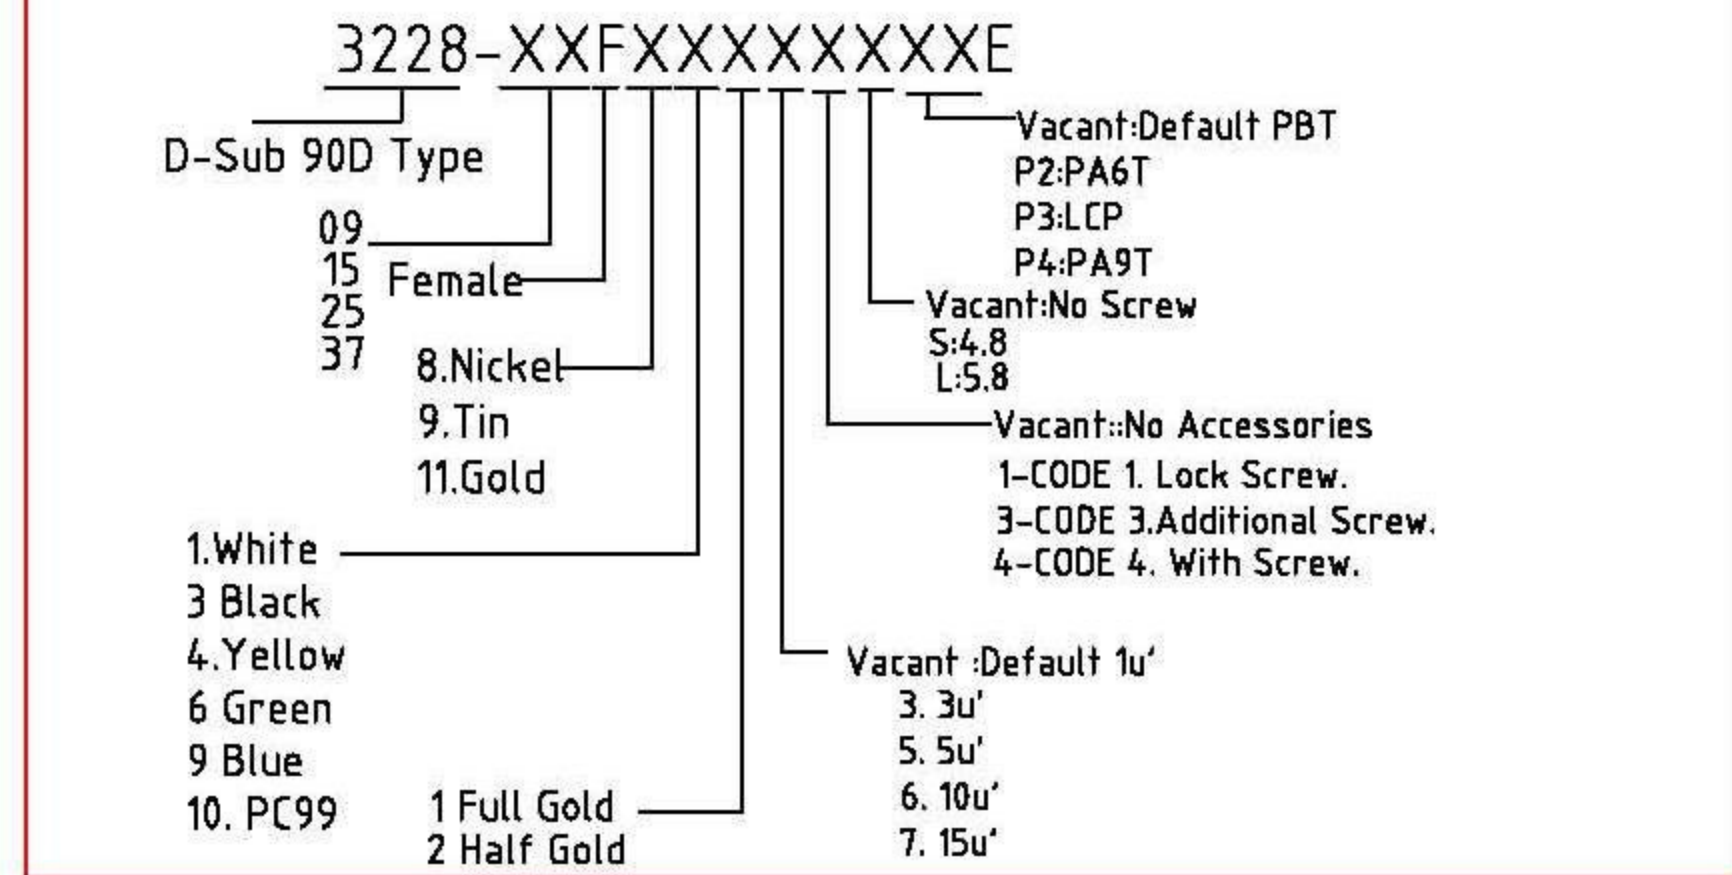


RevNo		Date	Signature	Checked

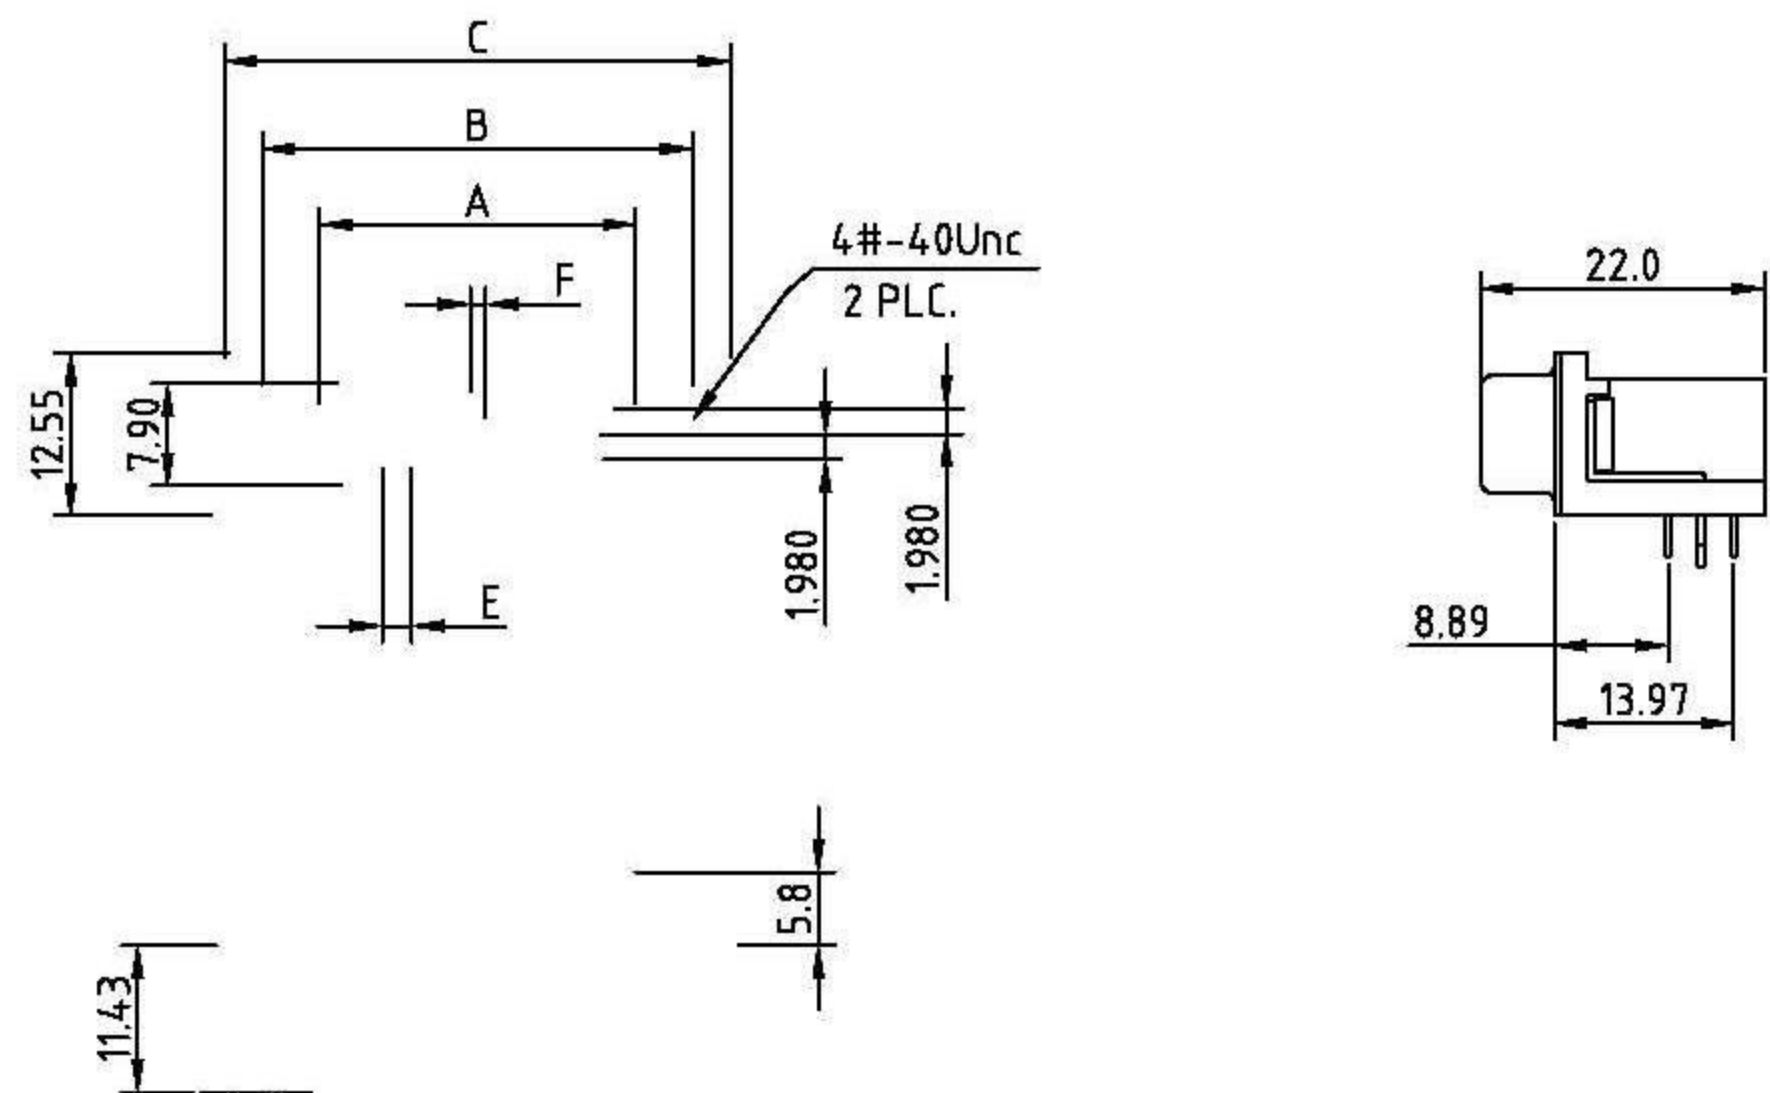

Note:

No.	A	B	C	E	F	H
15	16.33	24.99	30.81	2.29	1.145	7.04
26	24.66	33.32	39.14	2.29	1.145	6.88
44	38.38	47.04	53.04	2.29	1.145	6.88
62	54.84	63.50	69.32	2.41	1.205	7.00


Electrical Characteristic:

Contact Current Rating:3Amperes.
Dielectric Withstanding Voltage:AC 500V at sea level.
Insulation Resistance:1000Megohms Min.
Contact Resistance:25Milliohms Max.
Operation Temperature : -55°C to +105°C.



Material:

Contact :Copper Alloy.
Insulator:PBT. (Select PA6T /LCP /PA9T)
Shell: SPCC.
Z-Piece: Copper Alloy.
Screw: Copper Alloy.
Rivet: Copper Alloy. or Zinc.
RoHS

Re Layout P.C.B.
15 POSITION

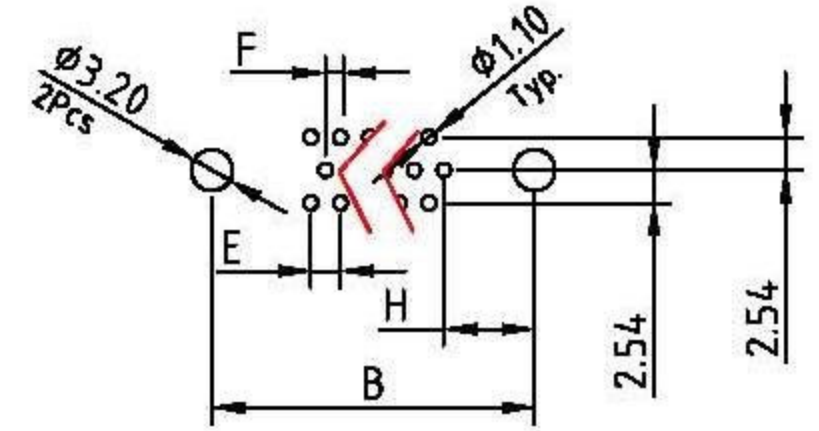

Re Layout P.C.B.
26 /44 /62 POSITION

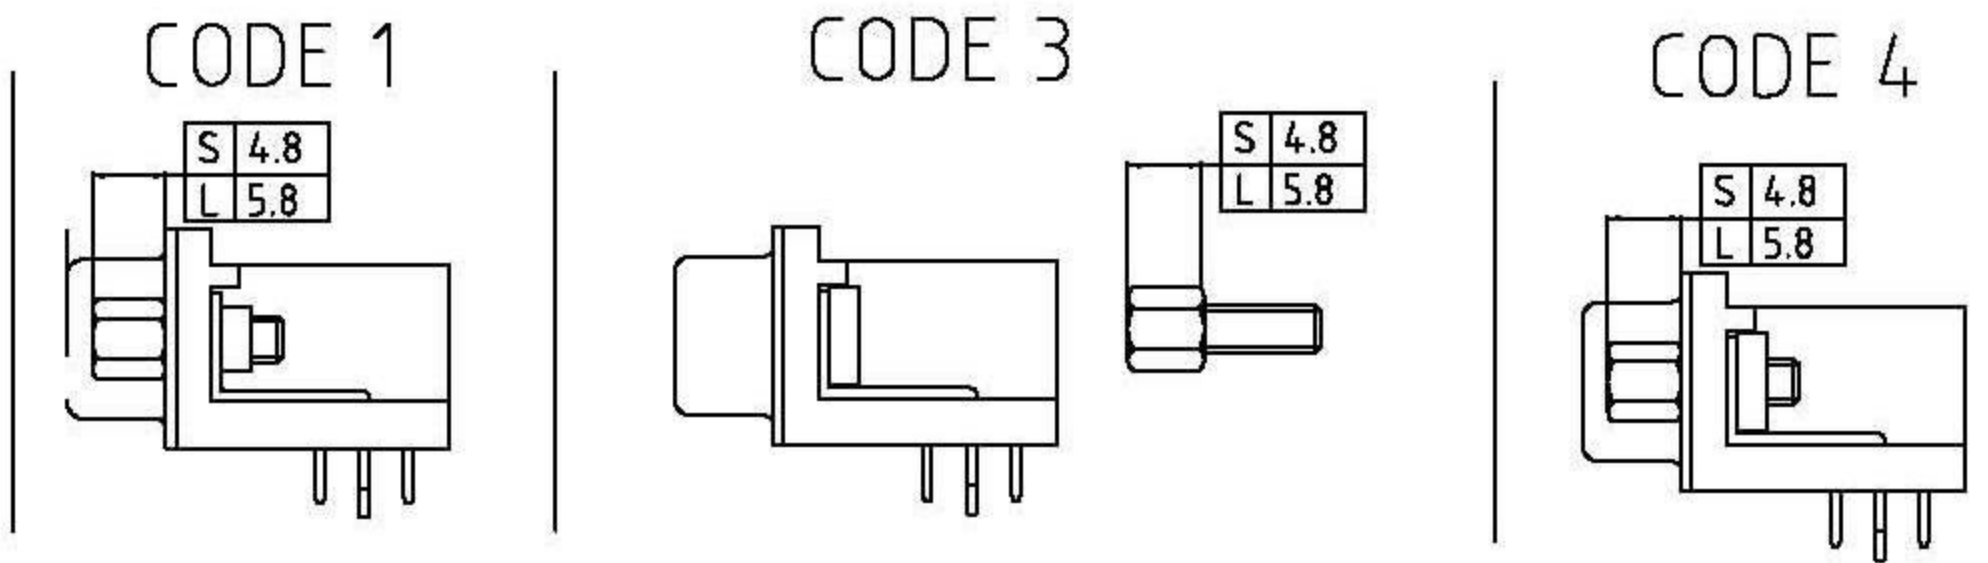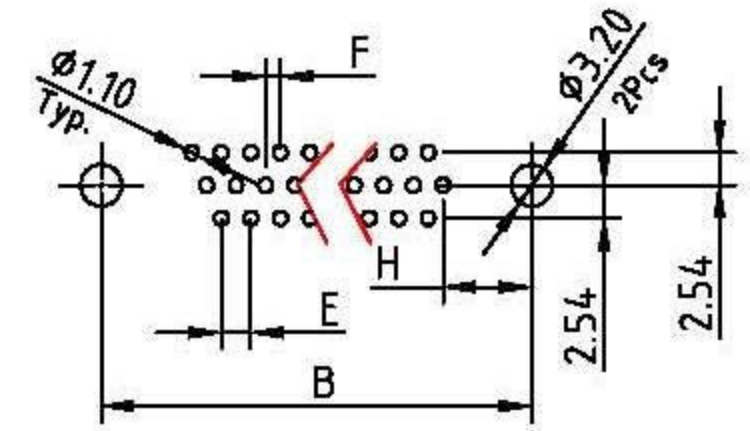

DRAW.BY	LinHaiFong	DATE	2011.07.28	UNIT	MM	TOLERANCE	.X ±0.30 .XX ±0.25 .XXX ±0.150	Ang. ± 2°
APPVL.BY	Shirley	VERSION	A	SCALE				



ITEM	D-SUB H-D Female 90D-DIP
PART No.	
Drawing NO	3228-001