

REV	ECN NO.	DESCRIPTION	DATE	APP'D
C/D		RELEASE TO PRODUCTION		Paul

Features:

- 2 ~ 12 circuits available
- Pin materail: Tin-plated brass
- Recommended PCB thickness: .070"(1.78mm) Max.
- Material: UL 94V-2

Specification:

- Current rating: (Used with #18 AWG)

Circuits	2 ~ 3	4 ~ 6	7 ~ 10	11 ~ 12
Ampere	9 A	8 A	7 A	6 A

- Voltage rating: 600V (R.M.S.)
- Contact resistance: 10mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C

Dimensional Information (mm)

Circuits	Dim. A	Dim. B
N	4.2 x (N - 1)	4.2 x N + 1.2



&& N = 2 ~ 12

Ordering Information


P N : 4 3 1 0 - x x I N E

Serial Type

No. of Contact
02~12PIN

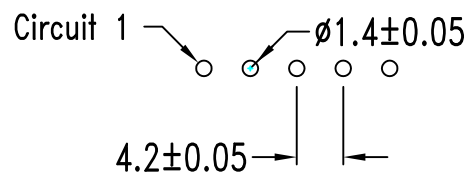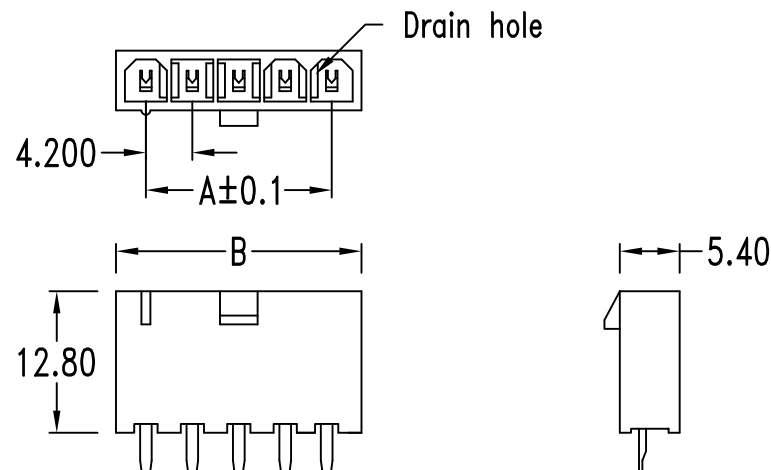

P.C.B. hole dimensions

TOLERANCE .000 ± 0.08 (mm) .00 ± 0.25 (mm) .0 ± 0.40 (mm)	APPROVALS	DATE	 易昕企業有限公司 LEAMAX ENTERPRISE CO., LED.		
	DRAWN Daniel	05-01-15			
	CHK'D Huang	01-06-15	TITLE: .165"(4.2mm) Vertical Header		
	APP'D Chen	12-06-15	DWG NO.4310-1S2		
UNTS mm	SCALE 1:1	SIZE:A4	SHEET 1 OF 1	REV. C/D	