

Features:

- 2 ~ 6 circuits available
- Accepts 4310-00TxE terminal
- Mates with 4310-xxlxE headers

Specification:

- Current rating and wire size:

Wire Size AWG	Circuits	
	2, 3	4 ~ 6
# 16	9 A	8 A
# 18	9 A	8 A
# 20	7 A	6 A
# 22	5 A	4 A
# 24	4 A	3 A
# 26	3 A	2 A
# 28	2 A	1 A

- Voltage rating: 600V (R.M.S.)
- Insulation resistance: DC 500V 1000M Ω min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C
(including temperature rise)
- Housing Material:UL 94V-2
- RoHS



Ordering Information

P N : 4 3 1 0 - x x | H M






Serial Type

No. of Contact
02~06 PIN

3PIN TYPE

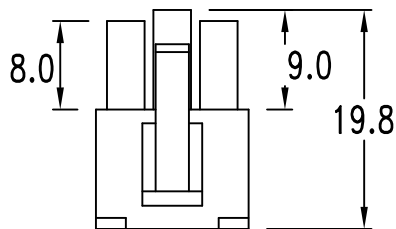


02PIN, 04~06PIN

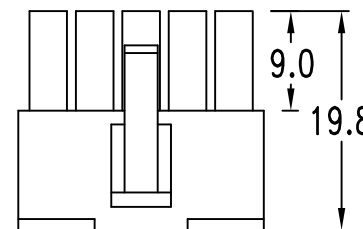

Dimensional Information (mm)

Circuits	Dim. A	Dim. B
2	4.20	9.6
3	8.40	13.8
4	12.60	18.0
5	16.80	22.2
6	21.00	26.4

REV	ECN NO.	DESCRIPTION	DATE	APP'D
C/D		RELEASE TO PRODUCTION		Paul

TOLERANCE	APPROVALS		DATE		 易昕企業有限公司 LEAMAX ENTERPRISE CO., LED.	
	.000 ± 0.08 (mm)	DRAWN	Daniel	20-08-03		
		CHK'D	Huang	05-05-14		
		APP'D	Chen	29-05-14		
.00 ± 0.25 (mm)	UNTS mm		SCALE 1:1	SIZE:A4	SHEET 1 OF 1	
.0 ± 0.4 (mm)					REV. C/D	

TITLE: .165"(4.2mm) Single Row Receptacle Housing

DWG NO.4310-HMA