

Features:





- 600V volts rating ( R.M.S. )
- Used in 4310-xxHME, 4311-xxHME housings
- Thickness: 0.2mm


Specifications:

- Voltage rating: 600V AC, DC
- Current rating up to 9A(with #18 AWG)
- Dielectric withstanding Voltage: 1500V AC/minute
- Contact resistance: Initial value/10mΩ max.  
After environmental testing/20mΩ max.
- Crimp resistance: 5mΩ max,
- Terminal retention force: 3.0Kg min.
- Ambient temperature range: -40°C ~ 105°C  
(including temperature rise)

Ordering & Dimensional Information ( mm )

Part No.	Dimension				Wire Size ( AWG )	Material	Finished
	a	b	c	d			
4310-00TFE	4.5	3.6	2.3	1.9	#18 ~ #24	Brass	Tin-plated

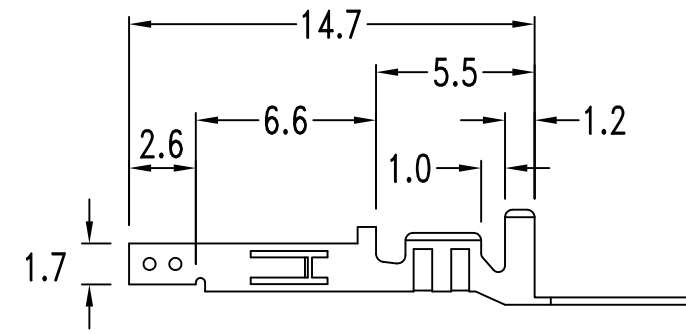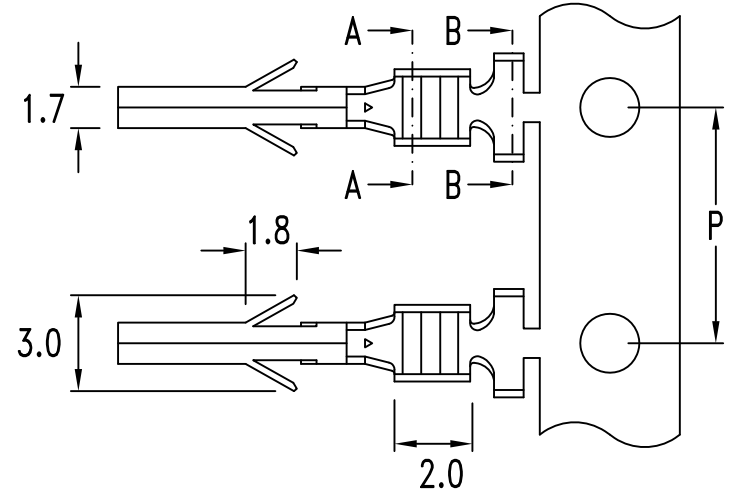

TOLERANCE  .000 ± 0.08 ( mm ) .00 ± 0.25 ( mm ) .0 ± 0.40 ( mm )	APPROVALS	DATE	 易昕企業有限公司 LEAMAX ENTERPRISE CO., LED.			
	DRAWN Daniel	20-08-03				TITLE: .165*(4.2mm) Female Crimp Terminal
	CHK'D Huang	01-04-15	DWG NO.4310-TF1			
	APP'D Chen	03-06-15	UNTS mm	SCALE 1:1	SIZE:A4	SHEET 1 OF 1