


REV	ECN NO.	DESCRIPTION	DATE	APP'D
C/D		RELEASE TO PRODUCTION		Paul

Features:

- 2 ~ 24 circuits available
- Material: UL 94V-2
- Positive housing locks
- Recommended PCB thickness: .07"(1.78mm) Max.

Specifications:

- Voltage rating: 600V AC, DC (R.M.S.)
- Contact resistance: 10m ohm Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40 °C ~ 105 °C
(including temperature rise)

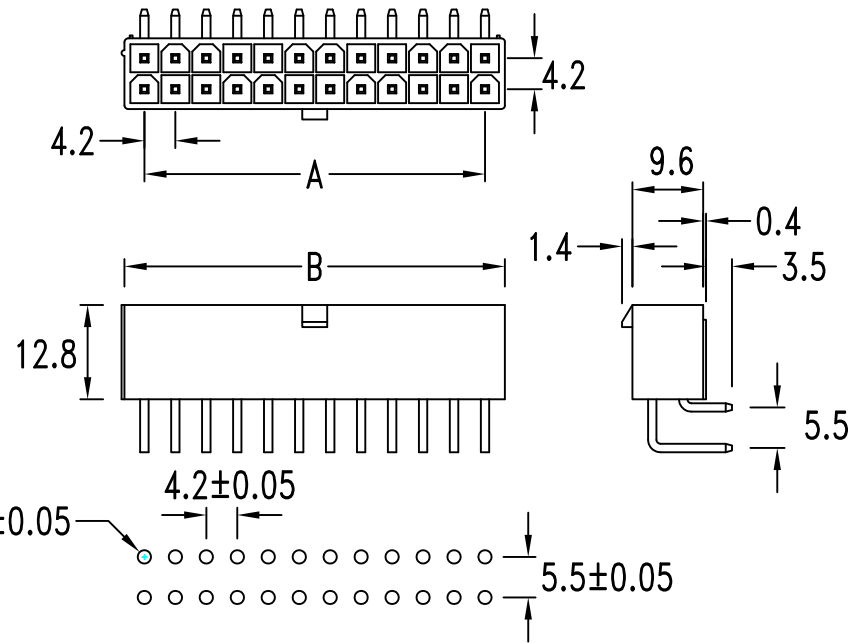

P. C. B . hole dimensions

Ordering and Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		5.4	10	16.8	22.2	18	33.6	39.0
4	4.2	9.6	12	21.0	26.4	20	37.8	43.2
6	8.4	13.8	14	25.2	30.6	22	42.0	47.4
8	12.6	18.0	16	29.4	34.8	24	46.2	51.6

- Current rating and wire size:

Wire Size AWG	Circuits			
	2	4, 6	8, 10	12~24
# 18	9 A	8 A	7 A	6 A
# 20	7 A	6 A	5 A	5 A
# 22	5 A	4 A	4 A	4 A
# 24	4 A	3 A	3 A	3 A

Ordering Information

P N : 4 3 1 1 - x x R N E



TOLERANCE .000 ± 0.08 (mm) .00 ± 0.25 (mm) .0 ± 0.4 (mm)	APPROVALS	DATE	易昕企業有限公司 LEAMAX ENTERPRISE CO., LED.
	DRAWN Daniel	15-15-94	
	CHK'D Huang	01-04-15	TITLE: .165"(4.2mm) Right Angle Header
	APP'D Chen	29-04-15	DWG NO.4311-2R1
UNTS mm	SCALE 1:1	SIZE:A4	SHEET 1 OF 1
			REV. C/D