

REV	ECN NO.	DESCRIPTION	DATE	APP'D
C/D		RELEASE TO PRODUCTION		Paul

Features:



- 2 ~ 24 circuits available
- Material: UL 94V-2
- Positive housing locks
- 600V volts rating
- Current rating up to 9 amperes per circuits
- 10 milliohms contact resistance
- Mates with 4310-xxHME series housing
- Recommended PCB thickness: .07"(1.78mm) max.

Specifications:

- Voltage rating: 600V AC, DC (R.M.S.)
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40 °C ~ 105 °C (including temperature rise)

Ordering and Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		5.4	14	25.2	30.6
4	4.2	9.6	16	29.4	34.8
6	8.4	13.8	18	33.6	39.0
8	12.6	18.0	20	37.8	43.2
10	16.8	22.2	22	42.0	47.4
12	21.0	26.4	24	46.2	51.6

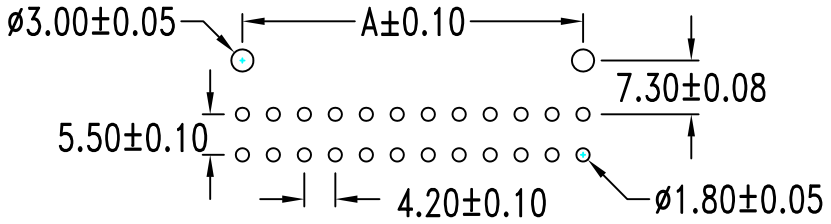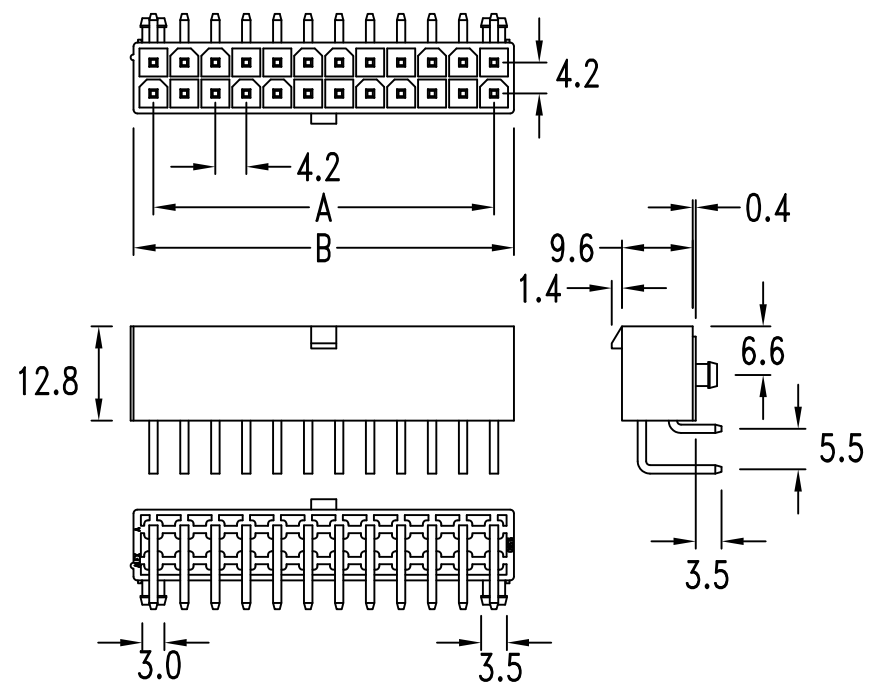

Order Information

P N : 4 3 1 1 - x x R 1 E

Serial Type: 4311, xx: No. of Contact (02~24 PIN), R: Right Angle Type, 1: With Mtg. Pegs

TOLERANCE .000 ± 0.08 (mm) .00 ± 0.25 (mm) .0 ± 0.4 (mm)	APPROVALS	DATE	易昕企業有限公司 LEAMAX ENTERPRISE CO., LED.		
	DRAWN Daniel	22-03-00	TITLE: .165*(4.2mm) Right Angle Header		
	CHK'D Huang	04-05-15	DWG NO.4311-2R3		
	APP'D Chen	25-05-15	REV. C/D		
UNTS mm	SCALE	SIZE:A4	SHEET 1 OF 1		