

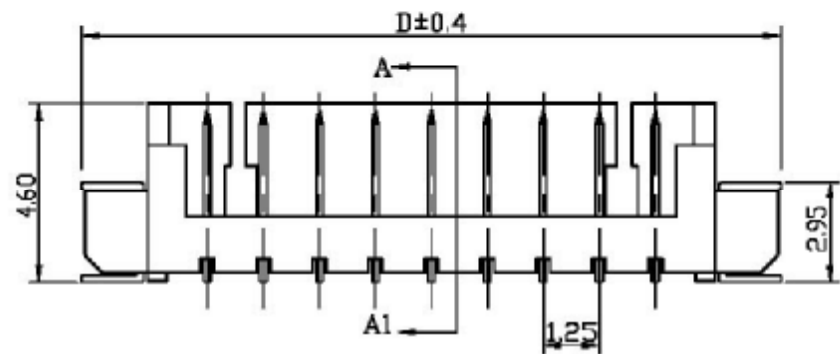
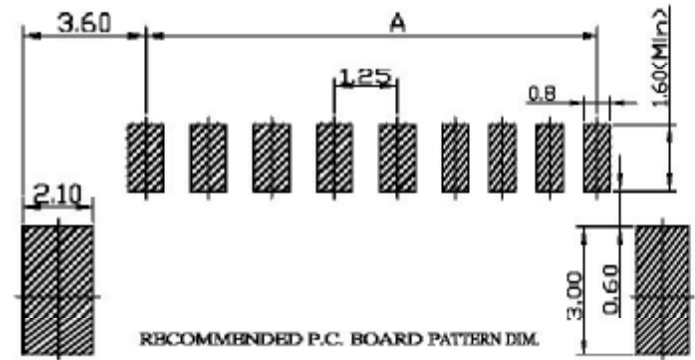


REV.	DESCRIPTION	DATE	APP'D
A/0	RELEASE TO PRODUCTION	08.07.22	Ricky
A/1	Part No. Update	08.10.06	Ricky

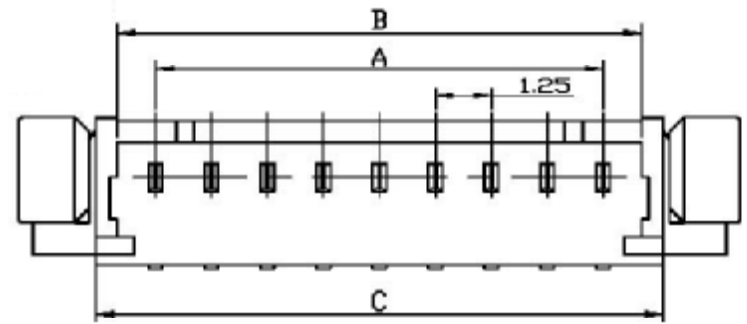

SPECIFICATIONS


Electrical

Current Rating: 1A Max
 Voltage Rating: 125V AC/DC
 Operating Temp: -25°C ~ +105°C
 Insulation Resistance: 100MΩ / min.
 Dielectric Withstanding Voltage: 250V AC / min.
 Contact Resistance: 10mΩ / Max.

Material

Wafer: High Temperature Plastic
 PA46 UL94V-0
 Pin: High Strength Brass With Tin Over
 Nickel Plated.
 Advise Work Condition: 240° MAX.(Peak Temp.)
 3Sec. or less
 Advise Work Time: 120sec~150sec.

Qty	A	B	C	D
2	1.25	3.15	4.25	7.65
3	2.50	4.40	5.50	8.90
4	3.75	5.65	6.75	10.15
5	5.00	6.90	8.00	11.40
6	6.25	8.15	9.25	12.65
7	7.50	9.40	10.50	13.90
8	8.75	10.66	11.75	15.15
9	10.00	11.90	13.00	16.40
10	11.25	13.15	14.25	17.65
11	12.50	14.40	15.50	18.90
12	13.75	15.65	16.75	20.15
13	15.00	16.90	18.00	21.40
14	16.25	18.15	19.25	22.65
15	17.50	19.40	20.50	23.90

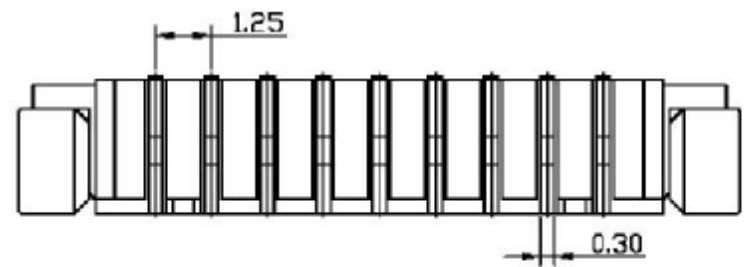

注：此產品所有材料均為RoHS材料。

TOLERANCE	APPROVALS	DATE	易昕企業有限公司	
X ±0.25	DRWN Amy Shen	08.10.06	LEAN MAX	LEANAX ENTERPRISE CO., LTD
XX ±0.25	CHKD James Chen	08.10.06	PART NO.	4318SxxSE
XXX ±0.15	APPD Amy Shen	08.10.06	FILED	Wafer-to-Board 1.25mm Wafer SMT 180° Type
XXXX ±0.05	UNITS/mm	SCALE/mm	SIZE: A4	SHEET 1 OF 1
ANGULA ±3°				