
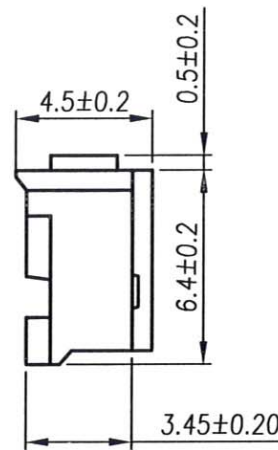
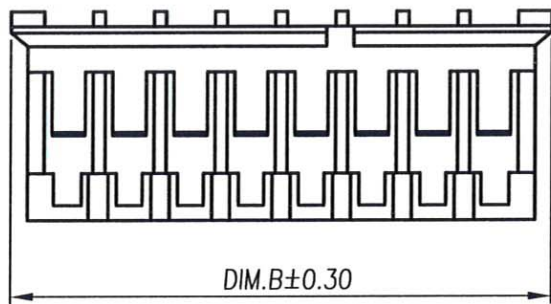


RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Release To Product	08-04-10	AJ
A1	Release To ECN20130307	27-03-13	Seven
A2	Release To ECN20130511	23-05-13	Michelle

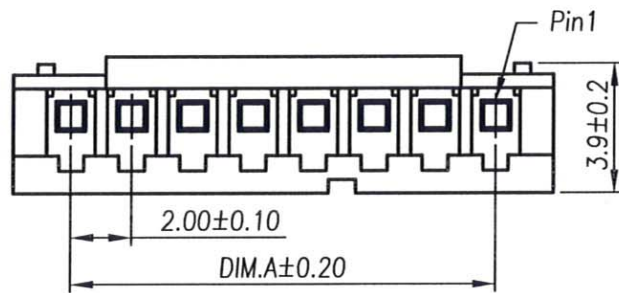

Specification

1. Current Rating: 2A
2. Voltage Rating: 100V AC/DC
3. Contact Resistance: 20mΩ Max.
4. Insulation Resistance: 1000MΩ Min. At DC 500V
5. Dielectric Withstand Voltage: 800V AC / Minute
6. Operating Temperature: -25°C ~ +85°C

Material:

1. Housing : Thermoplastic UL94V-0

Finish :

1. Housing : See P/N Option

PART NO.: 4320 - xx H x

No Of Pin
02~16



Housing Type & Color
H:Natural

Housing Material
E:PA66 UL94V-0 RoHS
H:PA66 UL94V-0 Halogen Free

PIN	DIM.A	DIM.B	PIN	DIM.A	DIM.B
02	2.00	5.80	10	18.00	21.80
03	4.00	7.80	11	20.00	23.80
04	6.00	9.80	12	22.00	25.80
05	8.00	11.80	13	24.00	27.80
06	10.00	13.80	14	26.00	29.80
07	12.00	15.80	15	28.00	31.80
08	14.00	17.80	16	30.00	33.80
09	16.00	19.80			

02-05P無缺口

06-10P一缺口

11-15P二缺口

16P三缺口



易昕企業有限公司
LEAMAX ENTERPRISE CO.,LTD.

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	TITLE:
.X± 0.35	X. ° ± 2°	APP Chen 19-07-16	Wire To Board Housing 2.00mm Male
.XX± 0.25	.X° ± 1°	CHK Huang 01-07-16	DWG NO. 4320-H01
.XXX± 0.15	.XX° ± 0.5°	DRA Michelle 25-03-13	UNITS: mm PN: 4320-xxHx
			SIZE: A4 SCALE 4:1 SHEET 1 / 1 REV A2 V