




1 2 3 4 5 6 7

2.54MM(0.100")PITCH HOUSING

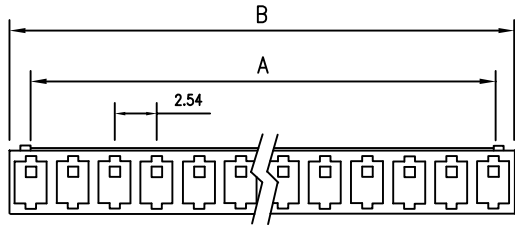

Circuits	Part No	Dimension mm	
		A	B
2	4326-H02	2.54	5.50
3	4326-H03	5.08	8.28
4	4326-H04	7.62	10.82
5	4326-H05	10.16	13.36
6	4326-H06	12.70	15.90
7	4326-H07	15.24	18.44
8	4326-H08	17.78	20.98
9	4326-H09	20.32	23.52
10	4326-H10	22.86	26.06
11	4326-H11	25.40	28.60
12	4326-H12	27.94	31.14
13	4326-H13	30.48	33.68
14	4326-H14	33.02	36.22
15	4326-H15	35.56	38.76
16	4326-H16	38.10	41.30
17	4326-H17	40.64	43.84
18	4326-H18	43.18	46.38
19	4326-H19	45.72	48.92
20	4326-H20	48.26	51.46

A

B

C

D

E


A

B

C

D

E

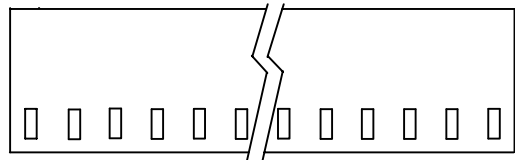

4326-HXX-□  
 □ 6.3mm±0.05  
 1=6.1mm±0.05  
 2=6.2mm±0.05  
 F=FLAT

Features:

- \* Available in 2 through 20 circuits
- \* Nylon 66 UL94V-2

Specifications:

- \* Pitch between poles 2.54mm
- \* Rated Voltage 250V AC,DC
- \* Rated Current 2AAC,DC
- \* Insulation Resistance 1,000V AC/MINUTE
- \* Temperature Range 1,000MΩ/MIN
- \* Tolerance±0.2 -25°~85°C



易昕企業有限公司  
 LEAMAX ENTERPRISE CO., LED.

PROJ		SCALE : F DO NOT SCALE DWG	MOLD NO	4326H	
APP	AMY	92.07.25	MODEL	FILE NO	REV. X1
CHK	CCJ	90.07.15	HOUSING		
DGN	WU	90.07.15	UNIT		SIZE A4
DRW	SHIEH	90.07.15	MM	SHT 1 OF 1	

1 2 3 4 5 6 7