
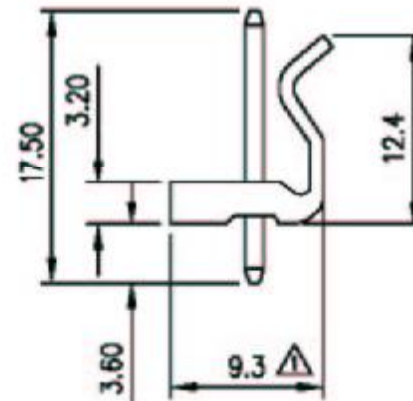


5.08mm(.200")Pitch Wafer

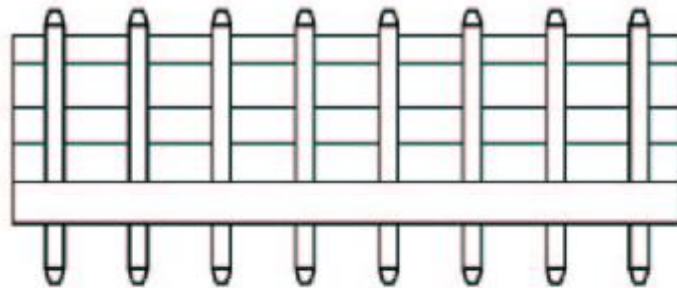

Ordering information:

4332-WXXSX

- T: Tin
- G: Gold
- S: Straight
- Pin: 02~12

Features:

- Available in 02 through 12 Circuits
- Material: Nylon 66 UL94V-2
- Mates with 4332 -HXX Series Housing
- 1.14mm(.045") Sward Pin
- Pin Material: Brass/Tin-Plated

Specifications:

- Pitch between poles 5.08mm
- Rated Voltage 250V AC,DC
- Rated Current 7A
- Withstand Voltage 1500V AC/min
- Insulation Resistance 1,000M Ohms/min
- Temperature Range -25°C~+85°C

Circuits	Part No	Dimension mm	
		A	B
2	4332-W02S	5.08	10.16
3	4332-W03S	10.16	15.24
4	4332-W04S	15.24	20.32
5	4332-W05S	20.32	25.40
6	4332-W06S	25.40	30.48
7	4332-W07S	30.48	35.56
8	4332-W08S	35.56	40.64
9	4332-W09S	40.64	45.72
10	4332-W10S	45.72	50.80
11	4332-W11S	50.80	55.88
12	4332-W12S	55.88	60.96

LEAMAX ENTERPRISE CO.,LTD



易昕企業有限公司

DRAW BY

Amy Shen

AUDITING

APPROVAL

DATE

2004.02.28

DWG NO

4332-xxS

014

TOLERANCE

.0 ±0.25

.00 ±0.15

.000 ±0.05