



RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Release To Production	11-12-08	Ricky
A1	Release To ECN20130208	07-03-13	Seven

Specification

- 1.Current Rating:7A
- 2.Voltage Rating:250V AC/DC
- 3.Contact Resistance:10mΩ Max.
- 4.Insulation Resistance:1000MΩ Min. At DC 500V
- 5.Dielectric Withstanding Voltage:1500 VAC/Minute
- 6.Operating Temperature:-25℃~+85℃

Material:

- 1.Housing:Thermoplastic UL94V-0
- 2.Contact Pin:Copper Alloy SQ=1.14mm

Finish:

- 1.Housing:NY66 UL94V-0 Natural
- 2.Contact Pin:Bright Tin Plated Over Ni

Part No.: 4333-VxxRE

No Of Contacts
02~14

PIN	DIM.A	DIM.B	PIN	DIM.A	DIM.B
02	3.96	7.92	09	31.68	35.86
03	7.92	11.92	10	35.64	39.90
04	11.88	15.84	11	39.60	43.84
05	15.84	19.84	12	43.56	47.92
06	19.80	23.80	13	47.52	51.72
07	23.76	27.88	14	51.48	55.92
08	27.72	31.74			

1 2 3 4 5 6 7 8

A

B

C

D

E

F

A





B

C

D

E

F

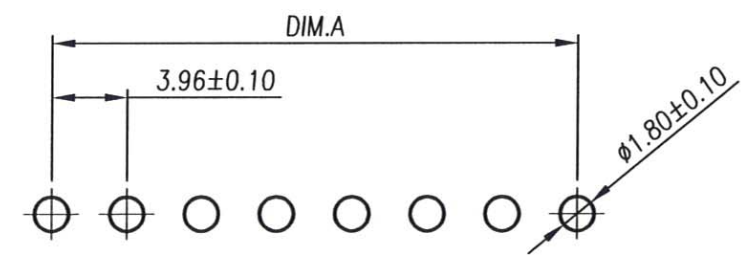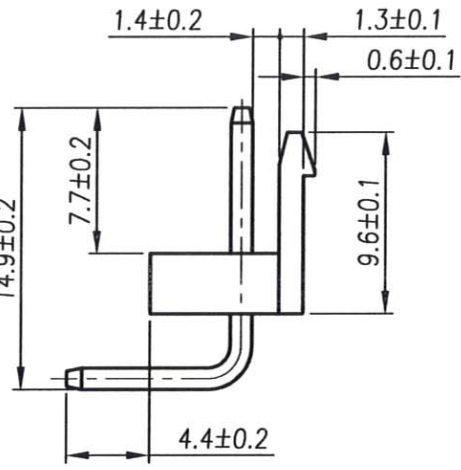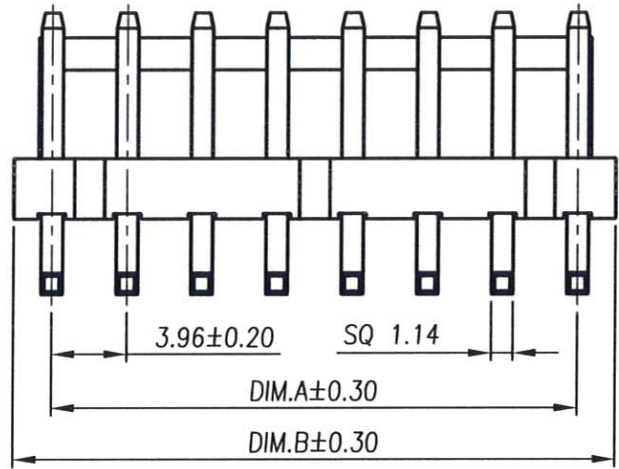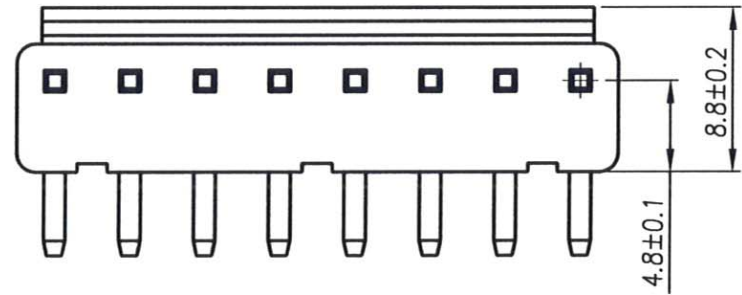

RECOMMENDED PCB LAYOUT
(Tolerance:±0.05)

1 2 3 4 5 6 7 8



易昕企業有限公司
LEAMAX ENTERPRISE CO.,LTD.

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	TITLE:			
.X± 0.35	X.°± 2°	Chen 29-08-17	Wire To Board Wafer 3.96mm 90° DIP			
.XX± 0.25	.X°± 1°	CHK Huang 01-08-17	DWG NO. 4333-VR1			
.XXX± 0.15	.XX°± 0.5°	DRA Seven 27-02-13	UNITS: mm	PN: 4333-VxxRE		
			SIZE: A4	SCALE 2.5:1	SHEET 1 / 1	REV A1 V