

REV	DESCRIPTION	DATE	NAME
A0	Release To Production	2010.01.18	AJ
A1	Release To ECN20110809	2011.09.09	Ivy

Notes:

- Specification
- 1.Current Rating:7A
 - 2.Voltage Rating:250V AC/DC
 - 3.Contact Resistance:10mΩ Max.
 - 4.Insulation Resistance:1000MΩ Min. At DC 500V
 - 5.Dielectric Withstanding Voltage:AC1500V/Minute
 - 6.Operating Temperature:-25℃~+85℃





- Material:
- 1.Housing:Thermoplastic UL94V-2
 - 2.Contact Pin:Copper Alloy SQ PIN=1.14mm
- Finish:
- 1.Housing:Natural
 - 2.Contact Pin:Bright Tin Plated Over Nickel.

Part no.: 433A X X X 0 1 5

Number of Pin 02~16
 R: Right Angle
 Packing 5:Bag

Housing Material 0:NY66 UL94V-2 Natural
 Plating 1:Bright Tin Plated Over Nickel

PIN	DIM. A	DIM. B	PIN	DIM. A	DIM. B
02	3.96	8.00	10	35.64	39.90
03	7.92	12.00	11	39.60	43.90
04	11.88	15.90	12	43.56	47.80
05	15.84	20.00	13	47.52	51.80
06	19.80	24.00	14	51.48	55.70
07	23.76	27.90	15	55.44	59.80
08	27.72	31.90	16	59.40	63.80
09	31.68	35.80			

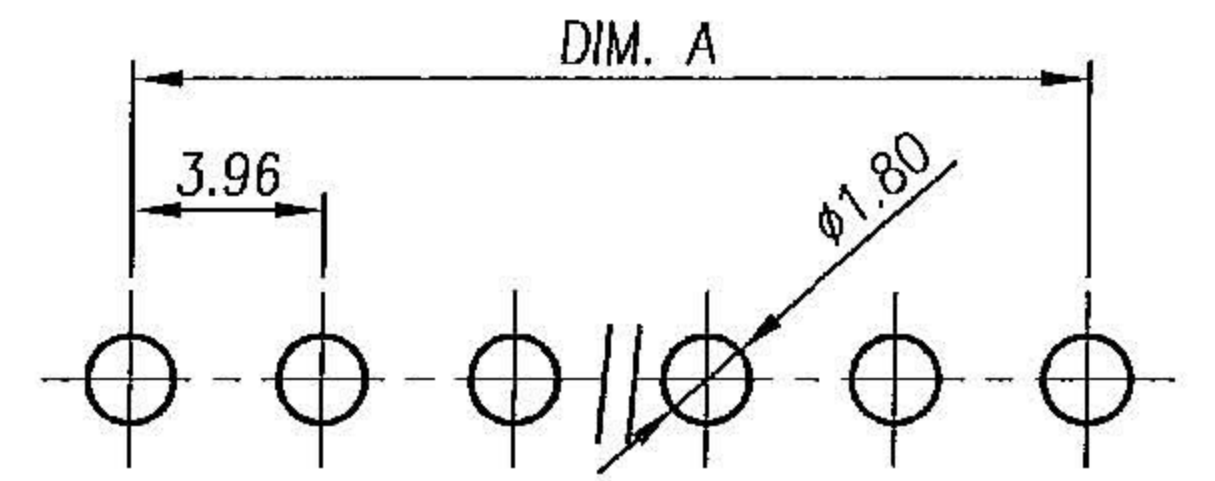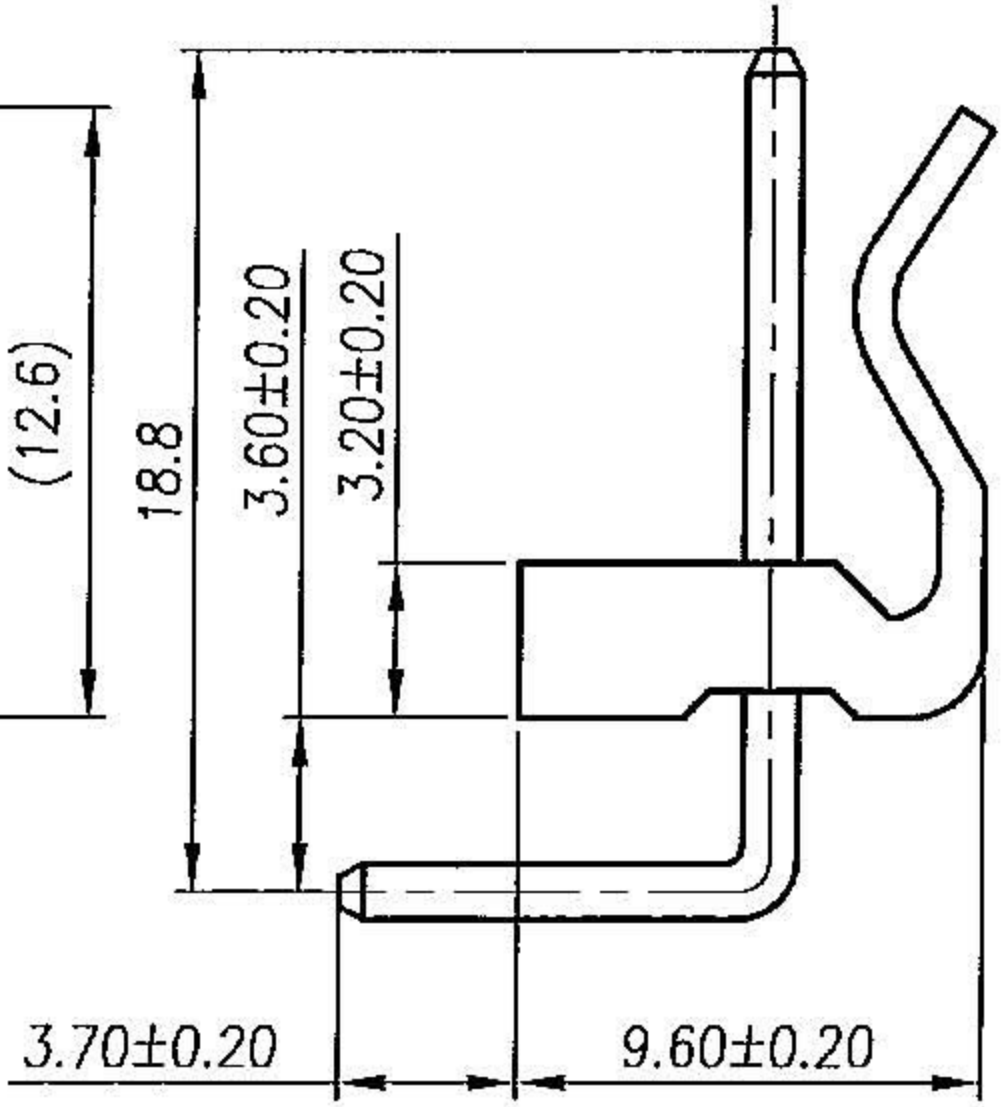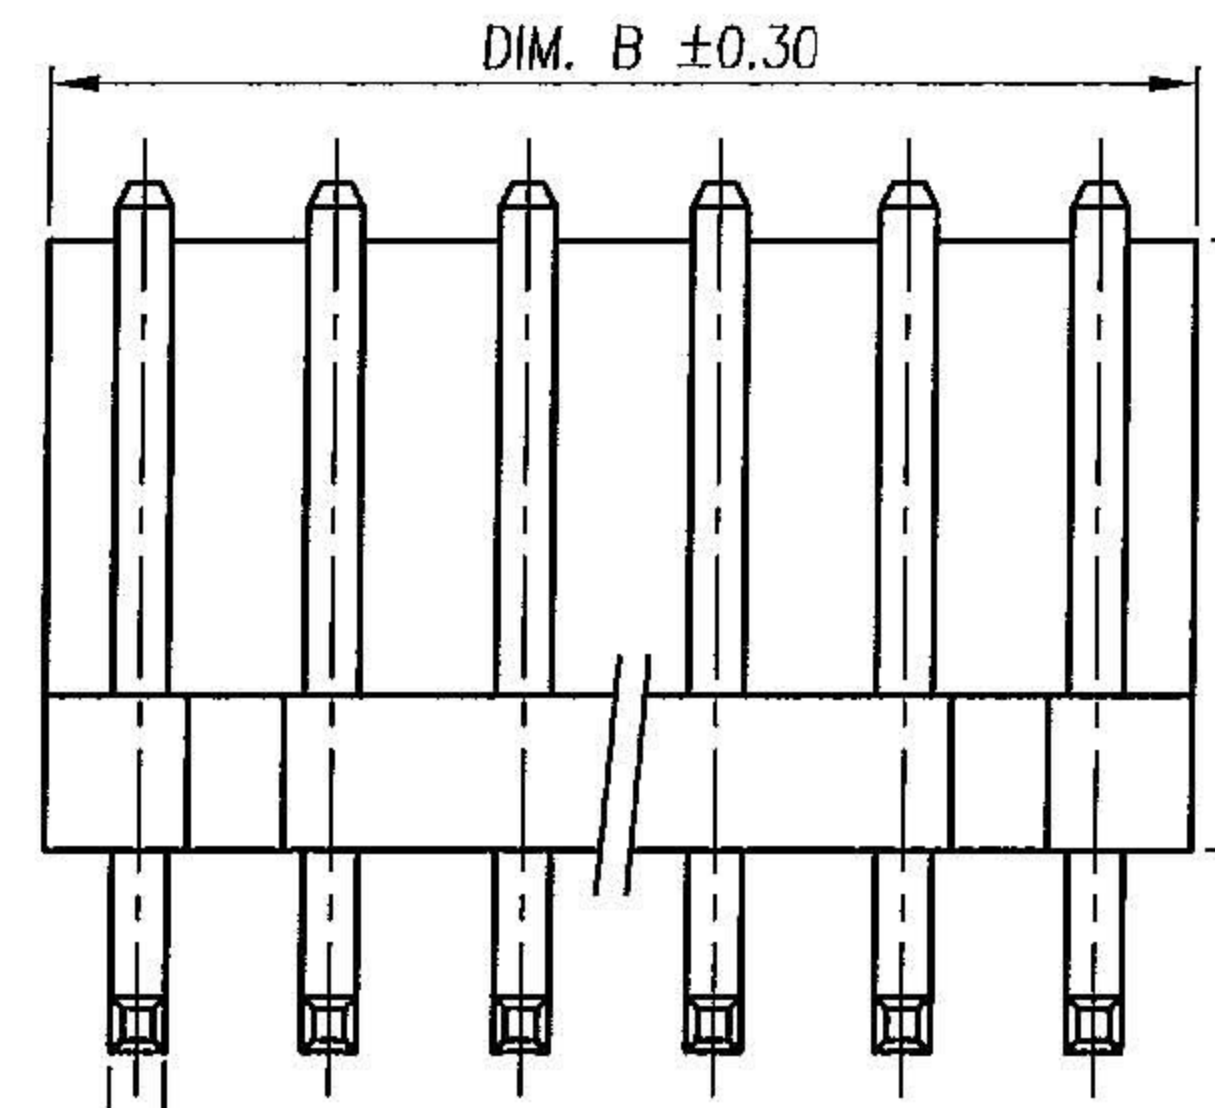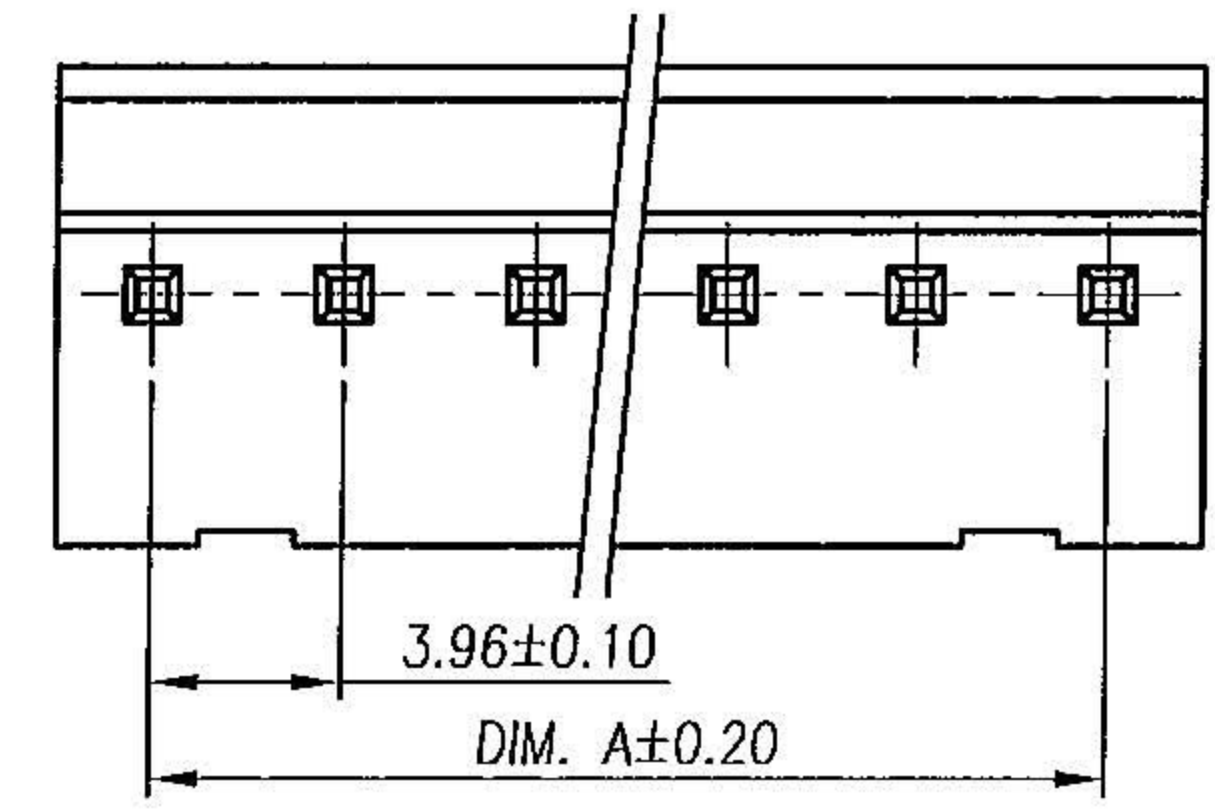

PCB LAYOUT
 (Tolerance:±0.05)

RoHS Compliant

TOLERANCE		NAME	DATE	易昕企業有限公司 LEAMAX ENTERPRISE CO., LTD. TITLE/品名: Wire To Board Wafer 3.96mm 90° DIP
X.	±0.35	Ivy	2011.09.09	
X.X	±0.25			
X.XX	±0.15			
X.XXX	±0.05			
ANGULA	±3°	Checked	Seven	2011.09.09
UNLESS OTHERWISE SPECIFIED		APPROVE	James	2011.09.29
		UNITS: mm	SCALE: Free	SIZE: A4
		PART NO.	433A Right Angle	1/1