

REV	DESCRIPTION	DATE	NAME
A1	更改圖樣	2009.04.17	BEN
A2	Release To ECN20110710	2011.08.01	Ivy
A3	Release To ECN20110809	2011.09.09	Ivy

Notes:

Specification

1. Current Rating: 7A
2. Voltage Rating: 250V AC/DC
3. Contact Resistance: 10mΩ Max.
4. Insulation Resistance: 1000MΩ Min. At DC 500V
5. Dielectric Withstanding Voltage: AC1500V/Minute
6. Operating Temperature: -25°C ~ +85°C

Material:

1. Housing: Thermoplastic UL94V-2
2. Contact Pin: Copper Alloy SQ PIN=1.14mm

Finish:





1. Housing: Natural
2. Contact Pin: Bright Tin Plated Over Nickel.

Part no.: 433A X X X 0 1 5



Housing Material: 0: NY66 UL94V-2 Natural
Plating: 1: Bright Tin Plated Over Nickel

PIN	DIM. A	DIM. B	PIN	DIM. A	DIM. B
02	3.96	7.92	10	35.64	39.60
03	7.92	11.88	11	39.60	43.56
04	11.88	15.84	12	43.56	47.52
05	15.84	19.80	13	47.52	51.48
06	19.80	23.76	14	51.48	55.44
07	23.76	27.72	15	55.44	59.40
08	27.72	31.86	16	59.40	63.36
09	31.68	35.64			

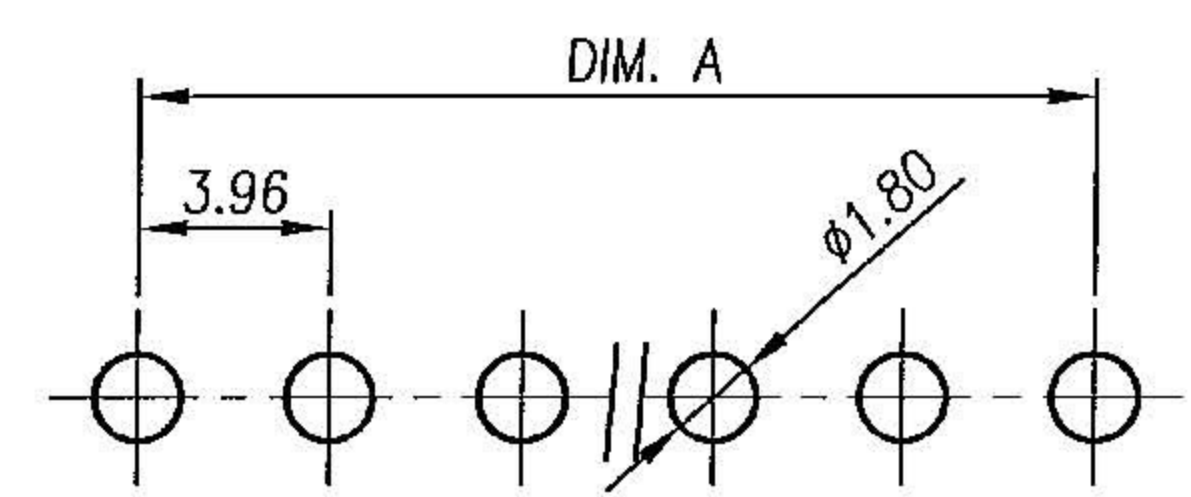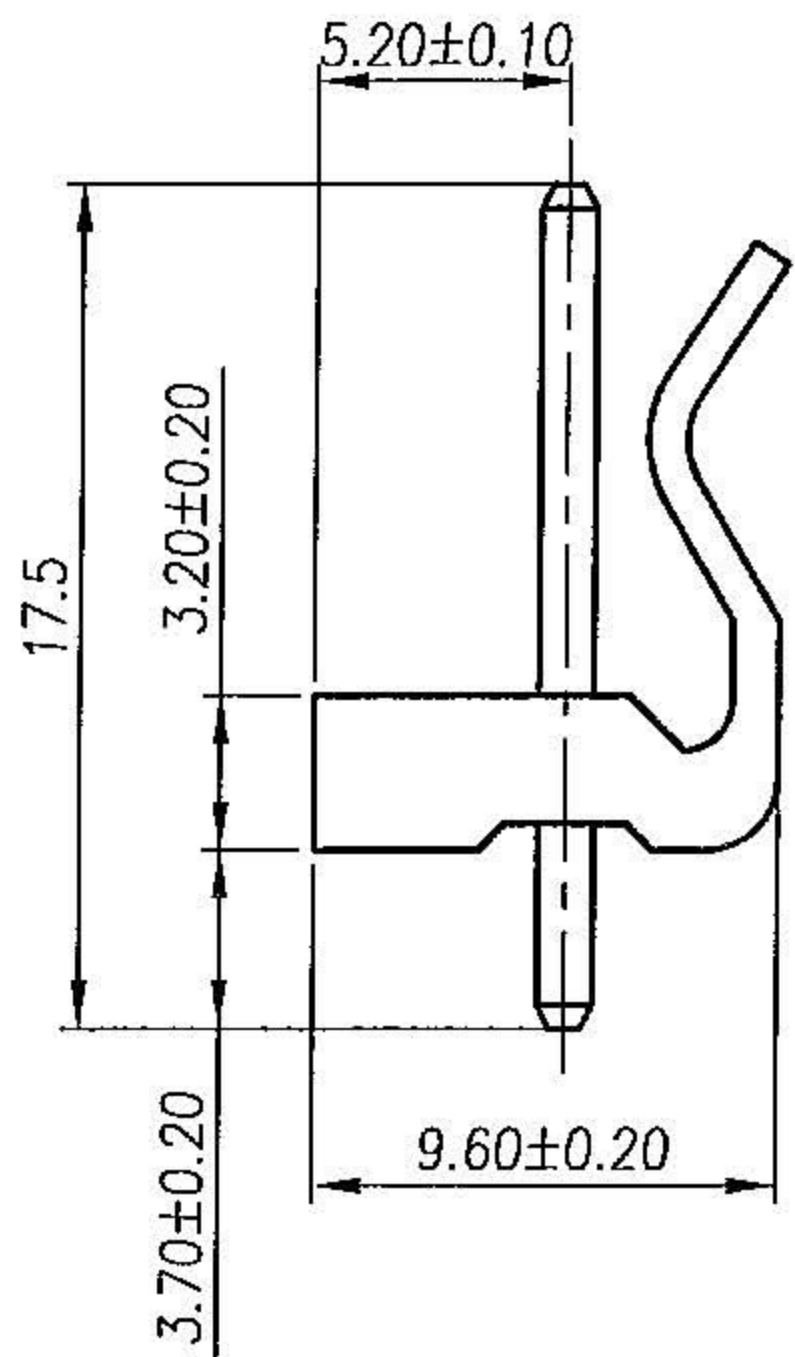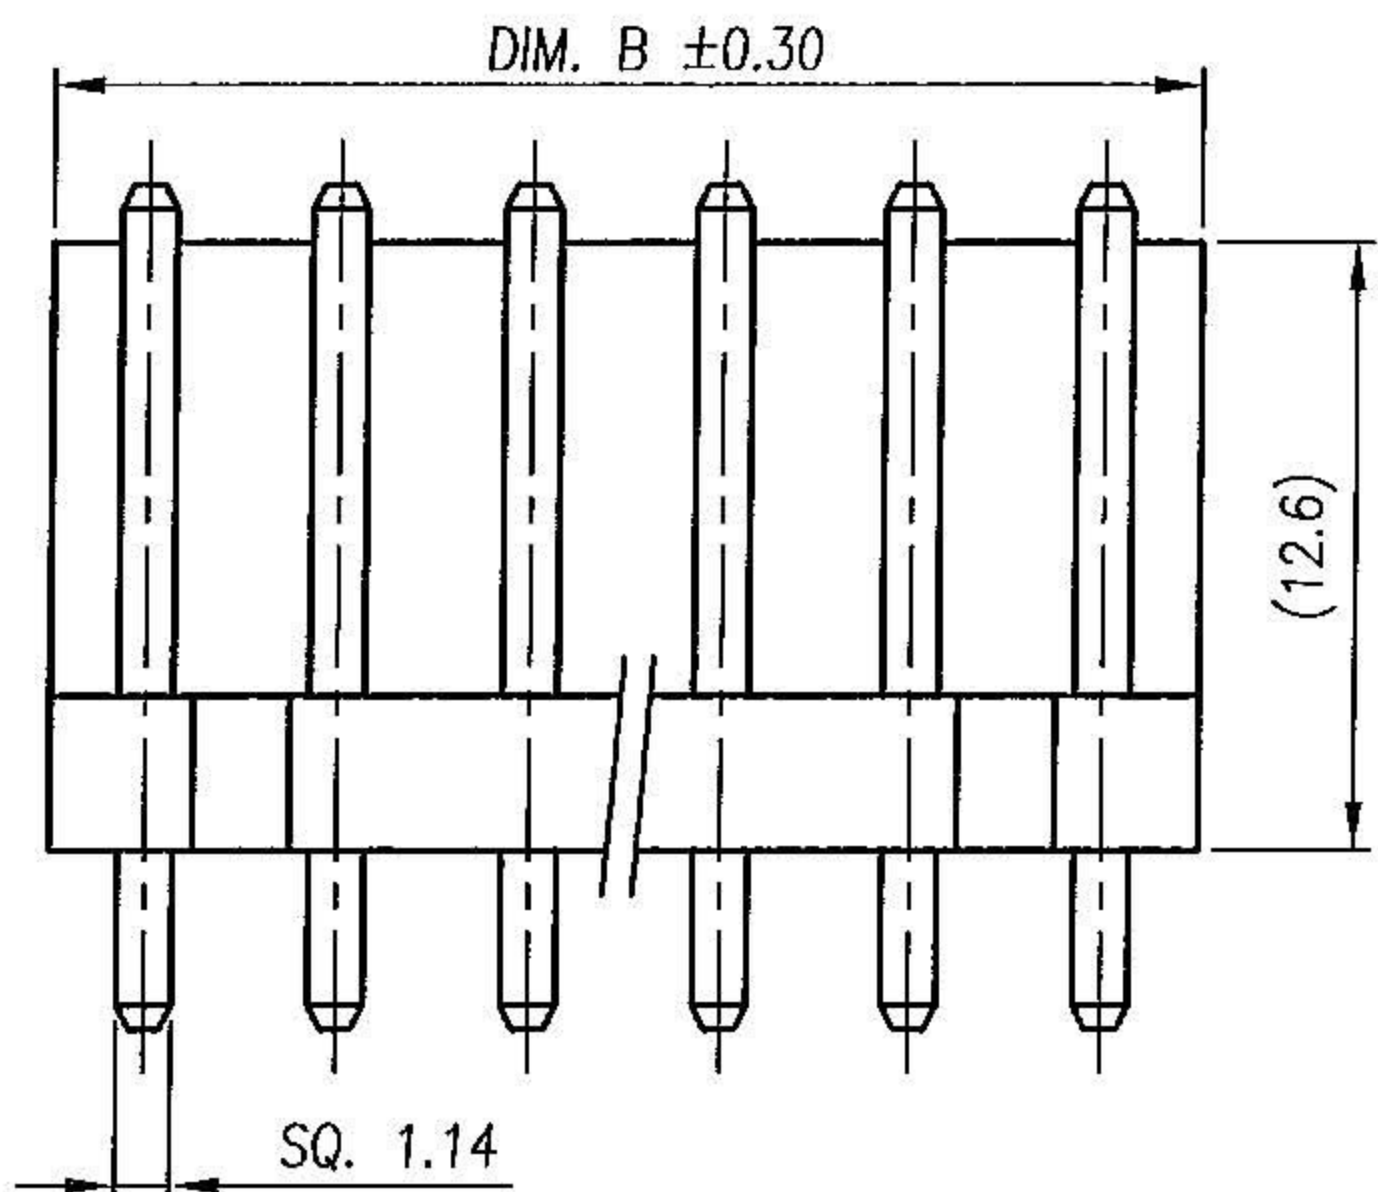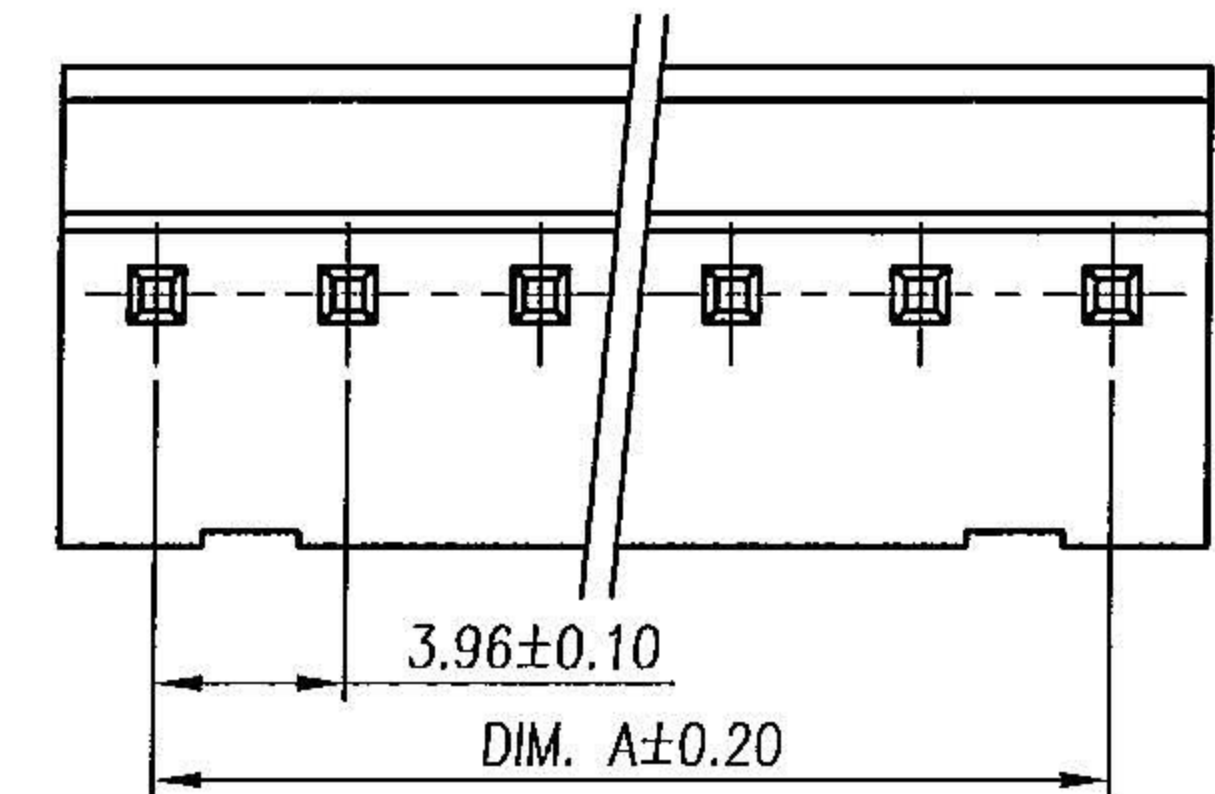

PCB LAYOUT

(Tolerance: ±0.05)

RoHS Compliant

TOLERANCE	NAME	DATE	易昕企業有限公司 LEAMAX ENTERPRISE CO., LTD. TITLE/品名: Wire To Board Wafer 3.96mm 180° DIP
X. ±0.35	Ivy	2011.09.09	
X.X ±0.25	Seven	2011.09.09	
X.XX ±0.15	James	2011.09.29	
X.XXX ±0.05			
ANGULA ±3°			
UNLESS OTHERWISE SPECIFIED	UNITS: mm	SCALE: Free	SIZE: A4
	PART NO. 料號	433A	straight type