
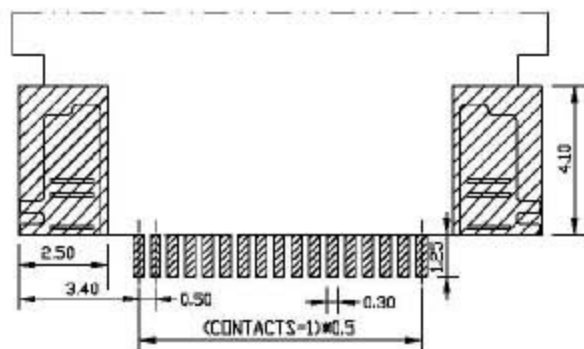


### FEATURE AND SPECIFICATIONS


SIZES 03 TO 60 PIN.  
 FOR 0.3mm THICKNESS FFC/FPC.  
 VOLTAGE:50V MAX.  
 CURRENT:0.5A MAX.  
 CONTACT RESISTANCE:20 milliohms MAX.  
 INSULATION RESISTANCE:50 Megohms MIN.  
 DIELECTRIC WITHSTANDING VOLTAGE:250V AC.  
 TEMPERATURE:-40°C TO 85°C

### MATERIAL AND FINISH



HOUSING:HIGH-TEMP. THERMOPLASTIC, UL 94V-0.  
 ACTUATOR:HIGH-TEMP. THERMOPLASTIC, UL 94V-0.  
 CONTACT:100μ" TIN  
 HOLD-DOWN:BRASS, PLATING:TIN

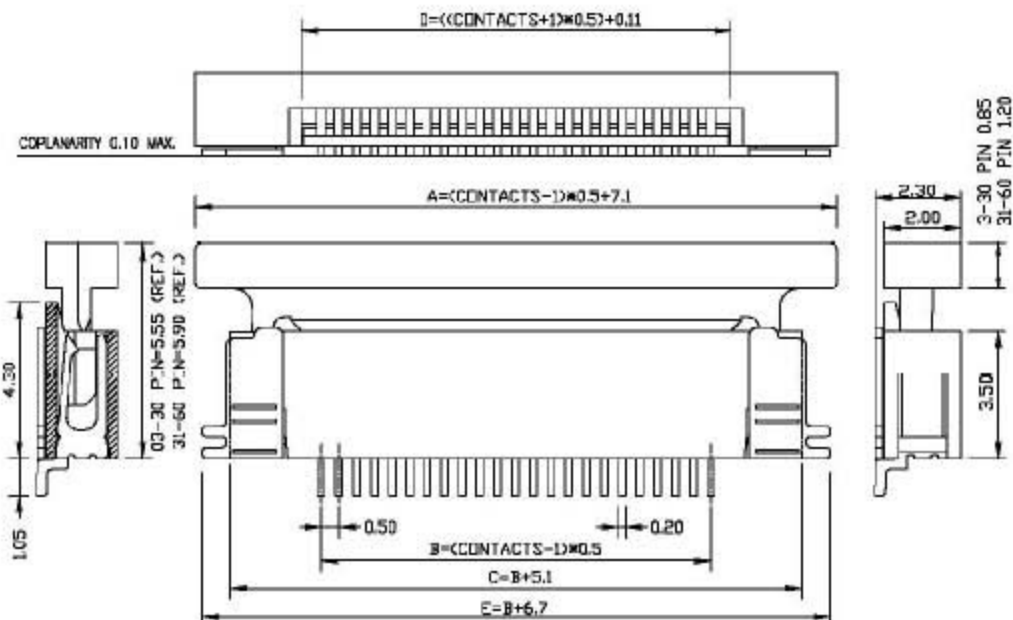

RECOMMENDED PCB LAYOUT



FFC/FPC DIMENSION  
 THICKNESS 0.30 mm

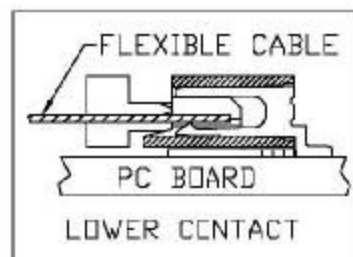

.X±0.20	.X±	單位MM	<b>LEAMAX</b>	LEA MAX ENTERPRISE CO., LTD
.XX±0.15	.XX±	材質		
.XXX±0.10	.XXX±	處理	易昕企業有限公司	名稱 ZIF FPC 0.5mm SMT TITLE CONN. HORIZONTAL LOWER CONTACT TYPE
		數量	日期 2011.09.26	圖號 5435-XXTE
			審核	SCALE SHEET REV.
			製圖 AMY SHEN	3/1 1/2 A